

MAIN MAGNETIC FIELD AND SLOW EXTRACTION CONTROL SYSTEM OF NUCLOTRON

B. Vasilishin, V. Andreev, V. Gorchenko, A. Kirichenko, A. Kovalenko, I. Kulikov,
B. Omelchenko, V. Karpinsky, S. Romanov, B. Sveshnikov, A. Tharenkov, V. Volkov, JINR,
Dubna, Russia

Abstract

The bending (BM), focusing (QF) and defocusing (QD) magnets of Nuclotron – superferric heavy ion synchrotron - are powered by three supplies. The BMs are driven by the supply of a 6.3 kA nominal current. The QFs and QDs are connected in series and powered by the 6 kA supply. An additional supply of 200 A for the QFs is used to keep the required ratio I_{QF}/I_{QD} . The BM magnetic field shape is set by a pulse function generator which produces a reference burst (B_0 -train) with a 0.1 Gs resolution. A real B-train of the bending magnet field with the same (0.1 Gs) resolution is used for feedback loop and as reference function for the QD and QF supplies. The QD and QF trains are utilized for feedback loop in the QD and QF supplies. The control of slow extraction system supplies is described as well. The extracted beam spill is used as the reference function for feedback loop of extraction quadrupole supply.

INTRODUCTION

The superconducting synchrotron Nuclotron based on miniature iron-shaped field magnets was put into operation in March 1993 at the Laboratory of High Energies JINR. The accelerator is intended to accelerate nuclei and multi-charged ions including the heaviest ones (uranium) up to an energy of 6 GeV/u for the charge to mass ratio $Z/A=1/2$. Twenty runs of the accelerator have been performed by the present time. Since December 1999, the slow extraction has operated on the Nuclotron. The Nuclotron Control System (NCS), which is in progress [1], has provided efficient support for a successful operation of the machine during all runs. The most important part of the NCS is the Nuclotron magnet power supply control subsystem (MPSC), which provides control and monitoring of magnetic field in the Nuclotron elements.

There are 96 bending magnets (BM), 32 focusing (QF) and 32 defocusing (QD) quadrupoles, 32 correcting multipoles in the Nuclotron magnetic ring with a circumference of 251.1 m. The maximum value of the magnetic field is about 2 T. The BMs are driven by the supply of a 6.3 kA nominal current. The QFs and QDs are connected in series and excited by the 6.3 kA supply. An additional supply of 200 A for the QFs is used to keep the required ratio I_{QF}/I_{QD} during an accelerator cycle.

The extraction process is realized by excitation of the radial betatron oscillation resonance $Q_x=20/3$. A 20-th harmonic of sextupole nonlinearity is excited by two pairs of sextupoles (ES1...ES4). The lenses of each pair connected in series are supplied from separate sources. It

permits one to excite an arbitrary phase of the sextupole disturbance. Four extraction quadrupoles (EQ1...EQ4) connected in series and driven from one source are used to perform the tune shift ΔQ_x within the resonance band. The beam is extracted by means of an electrostatic septum (ESS) and a Lambertson magnet (LM). The LM is connected in series with the BMs, but there is an additional power supply for the LM used for beam correction in the vertical plane.

GENERAL MPSC DESCRIPTION

The MPSC performs the following main functionality:

- Generation of analog signals for control of the Nuclotron magnetic elements in accordance with the parameters specified on the operator console.
- Generation of the cycle timing pulses for synchronization of the Nuclotron subsystems with a magnetic cycle.
- Data presentation in graphical and text formats, transmission of the complete set of information on the MPSC status to the database and alarm server.

A schematic diagram of the MPSC is shown in Fig.1. The magnetic cycle is specified at a $B(t)$ level, and the waveforms, which drive the power supplies, are generated by function generators controlled through console software. The BM magnetic field shape is set by a pulse function generator (PFG) which produces 3 reference bursts: $(B_0)^+$ -train according to a rising parts of the magnetic field, $(B_0)^-$ -train according to a falling part and B_0 -train ($B_0=(B_0)^++(B_0)^-$). One pulse of the trains corresponds to 0.1 Gs change of the magnetic field. The magnetic cycle beginning is given of cycle start pulses, produced by the cycle timer. These pulses cause the restoration of the initial PFG state and give a start for function generation.

The $(B_0)^+$ -train increments and $(B_0)^-$ -train decrements the pattern B_0 analog function generator (AFG) based on a 16 bit DAC. Each train consists of a certain number (≤ 4096) series (vectors) of pulse. The vector is determined by two 24-bit integers: the number of steps (pulses) and step size. Each vector defines part of the magnetic cycle with the constant time derivation, which is determined by the pulse frequency (step size) in this vector. The parabolic form of initial part of the cycle and the edges of flattops is approximated by set of linear parts. The output analog signal (AB_0) of the B_0 AFG is fed to the magnetic field forming system. The B_0 -train is passed to the timing pulse selector (TPS), which is a multi-channel trigger, based on 18 bit counter. It

$$Kdc = \left(\int_{t1}^{t2} \frac{dN}{dt} dt \right)^2 / (t2 - t1) \int_{t1}^{t2} \left(\frac{dN}{dt} \right)^2 dt$$

is $Kdc=0.98$. (N is the number of particles, $t2-t1=4963$ ms is duration of the spill).

The circulating beam intensity signal measured and stored just before extraction is used as a reference for obtaining the constant-time-length spill.

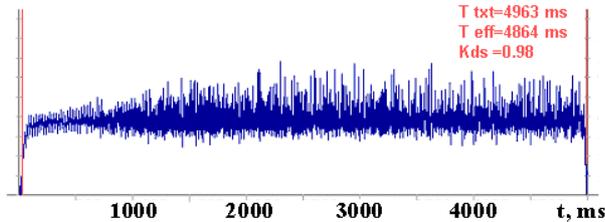


Figure 3: Beam spill with a feedback loop.

SOFTWARE

The set of parameters is specified through the console menu. This set includes, for instance, parameters of parabolic segments and linear fractions at various parts of the magnetic cycle, a maximum value of the field, the number of flattops and their duration, flattop locations relative to the magnetic field values, accelerator cycle duration and so on. Software provides the storing and retrieving settings, automatic recording with a time-stamps of all made adjustments, as well as means of stepping back through these changes. The MPSC status is available in the dynamic database. It is updated each accelerator cycle. The archive database keeps a long-term history of the system. The database access (routines) named the Data Viewer allow the users to select data sets

for visual observation or printing on the remote workstations (Fig. 3). The alarm server monitors continuously any changes of the MPSC state and detects fault conditions.

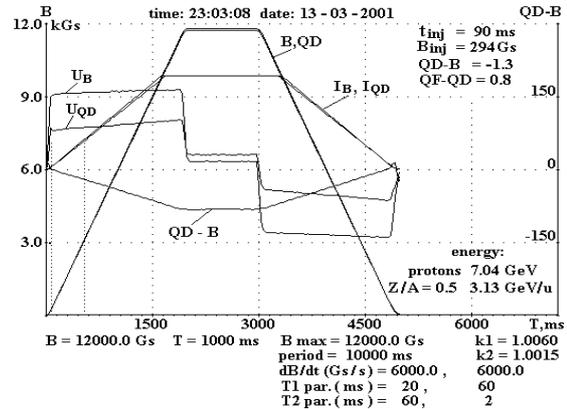


Figure 4: Example of magnetic field cycle parameters.

CONCLUSION

The MPSC has been successfully used in all Nuclotron runs being capable of generating precision rumps ranging from a fraction of 1kGs/s up to 10kGs/s. Now, modifications are undertaken to improve the stability of slow extraction supplies. It will reduce the ripples in the extracted beam, particularly high frequency ripples. The 16 bit DACs will be replaced with 18 bit devices. These improvements will reduce significantly the beam loses at extraction and raise the extracted beam homogeneity.

The authors are grateful to L.Sveshnikova for her help in preparing this paper.

REFERENCES

- [1] V. Andreev et al, "Nuclotron Control System", PAC'97, Vancouver, May 1997.