

full. The maximum depth of FIFO is 8192 long word in each channel. The maximum recording time is 3.2 milliseconds in the turn-by-turn mode.

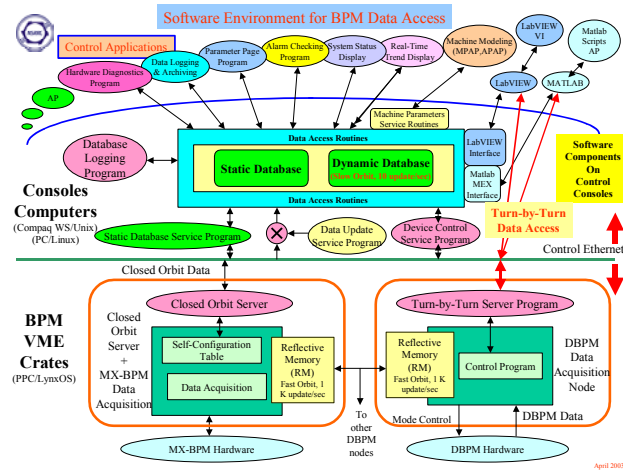


Figure 2: Software environment for BPM data access.

SYSTEM PERFORMANCE

To examine the closed orbit performance, short-term and long-term test in underway. The long-term stability can be achieved $\sim \mu\text{m}$ level with 1 kHz output rate that is comparative with existing orbit feedback system. The resolution can be better after optimized the parameters of digital receiver.

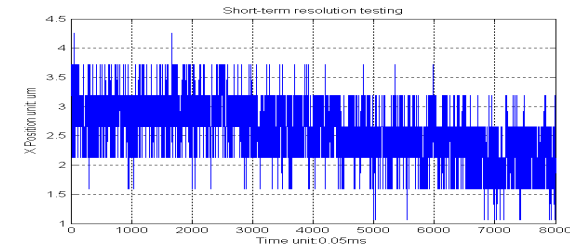


Figure 3: Short-term stability in the closed orbit mode with 1 kHz output rate.

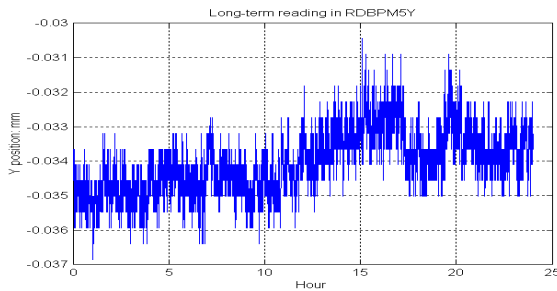


Figure 4: Long-term stability in the closed orbit mode with 1 kHz output rate.

The short-term standard deviation of BPM is $0.48 \mu\text{m}$. The operation condition is adjusted in the special test mode, output rate is 20 kHz. FIR filter bandwidth is 1 kHz in the last stage. The steady state drift is due to clear memory to empty in each access. In turn-by-turn mode, we need this mechanism. But we don't need clear

memory in the close orbit mode, so drift problem isn't so evident. The status is shown in the figure 4.

The revolution frequency of the storage ring of NSRRC is 2.498 MHz. The turn-by-turn BPM electronics have 1.249 MHz bandwidth is essential in principle. However, the fractional tune of the storage ring is operated less than 0.33, bandwidth of 0.8 MHz is enough to support the measurement. The preliminary turn-by-turn parameters set achieves 0.8 MHz bandwidth (-3 dB) at this moment as shown in figure 5. The investigation is going how to increase bandwidth by optimize the parameters of digital receiver. Adopt data post processing to compensate the frequency response to increase the bandwidth is another alternative solution.

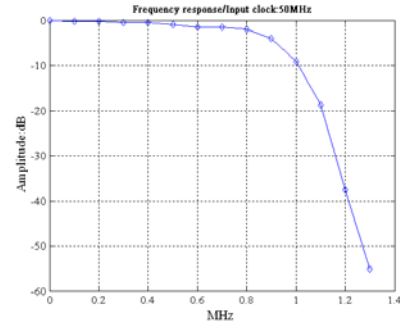


Figure 5: Bandwidth of DBPM system for turn-by-turn mode.

To demonstrate the functionality of the turn-by-turn mode, various testing have been done recently. Figure 6(a) presents the data of a BPM in frequency domain with horizontal kick. Betatron oscillation is clearly observed by the output of DBPM. Figure 6(b) shows the data of a BPM in frequency domain with vertical kick. Figure 7 shows a DBPM horizontal reading in the time domain of DBPM with $\sim 1 \text{ mrad}$ horizontal kick by an injection kicker, the horizontal betatron oscillation is excited. After two thousand turns, there is some coupling effect in the beam and then beam position is grown up.

The turn-by-turn beam position in for one DBPM is shown in the figure 8 when the RF gap voltage modulation is turn on. The RF gap voltage modulation is used to remedy the strong longitudinal coupled-bunch instability right now. The beam was excited by narrow band white noise, both horizontal and vertical betatron oscillation are excited. The top figure is the signal picked up by a single button. The prominent sinusoidal signal indicates the controlled energy oscillation by the RF gap voltage modulation. Turn-by-turn beam position is calculated by using four button signals. The horizontal position is ride on the 50 kHz of background that is shown in the middle figure. This background is due to uncalibration of the four button processing chain. Parallel processing electronics are insensitivity to the longitudinal instability in principle. The background can be minimized after applied proper calibration correction. Bottom figure is the vertical position shown clean betatron oscillation. The phase space measurement by two BPMs with horizontal phase advance near $\pi/2$ is shown in the figure 9. The difference color dots define various groups of turns.

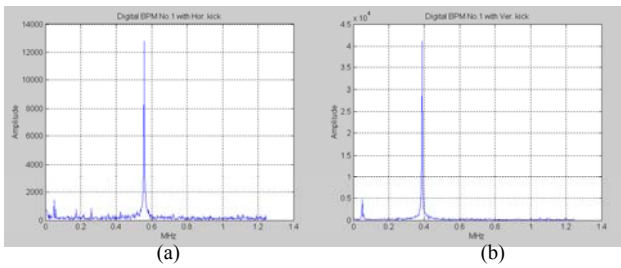


Figure 6: (a) The frequency domain of digital BPM with horizontal kick, (b) with vertical kick.

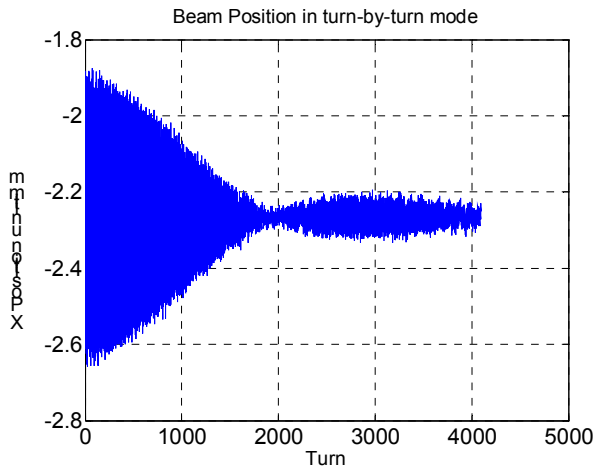


Figure 7: Damped horizontal betatron oscillation observed by a BPM.

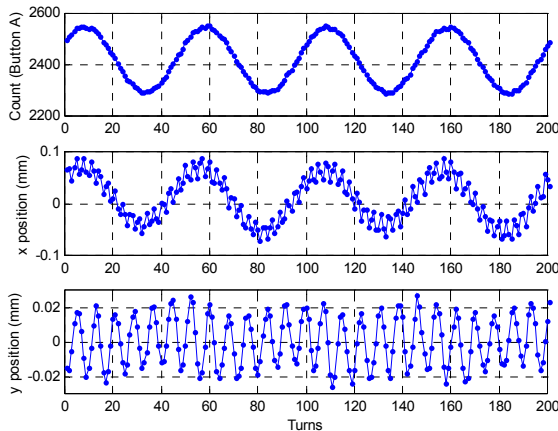


Figure 8: Turn-by-turn performance test of DBPM, shown that the turn-by-turn resolution is better than 10 μm . Upper: single button signal; Middle: un-calibrated horizontal position; Bottom: un-calibrated vertical position.

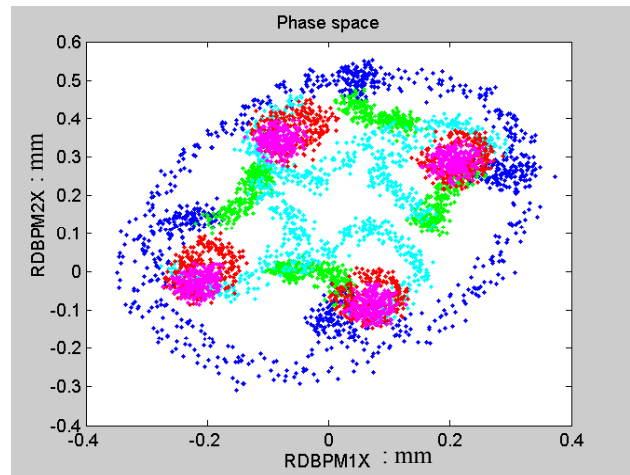


Figure 9: Phase space portrait near 4th order resonance, blue dots:1 to 1000 turns, green dots: 1001-2000, cyan dots:2001-3000, red dots:3001-4000, magenta dots: 4001-5000.

CONCLUSION

System integration and beam test is on going. The beam test results show that the system is working properly, but noise immunity is still necessary to improve. Although DBPM resolution is high in the wide bandwidth, it is still fatally interfered by the high frequency switching noise of the crate power supply due to alias effect. Remaining work includes integrating the system to join routine operation in closed orbit mode and develops better Matlab scripts to support various requirements for turn-by-turn mode. Solve interference come from the crate is also in investigation. Work out the calibration scheme is on-going. Integration small number of digital BPMs accompany with existing MX-BPM is short-term goal.

REFERENCES

- [1] M. Dehler, et al., "Digital BPM System for the Swiss Light Source – First Operation Results", AIP Conference Proceedings 546, 572 (2000).
- [2] V. Schlott, et al., "First Operational Experience with the Digital Beam Position Monitoring System for the Swiss Light Source", Proceeding of EPAC 2000, Vienna, Austria, 1809 (2000).
- [3] <http://www.i-tech.si/products-dbpm2-p.html>.