


Construction of cERL Cryomodules for Injector and Main Linac



Members for ERL Main linac

K. Umemori, T. Furuya, H. Sakai (KEK),
K. Shinoe (ISSP, University of Tokyo),
M. Sawamura (JAEA-ERL),
E. Cenni (Sokendai)

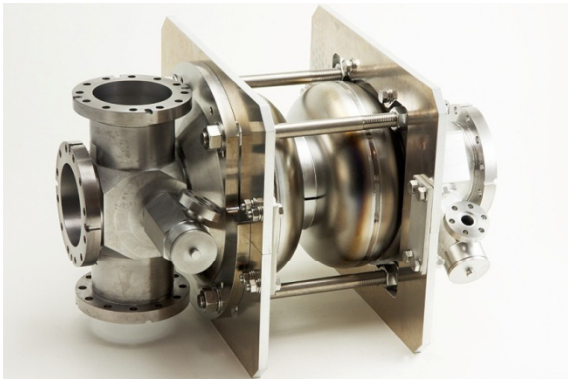

Members for ERL Injector linac

E. Kako, S. Noguchi, M. Satoh, T. Shishido,
K. Watanabe, Y. Yamamoto (KEK)

Contents

- Compact ERL (cERL) project
- Injector
 - Cryomodule
 - 2-cell cavity
 - Input coupler
 - HOM coupler
- Main linac
 - 9-cell cavity with cavity diagnostics
 - Input coupler
 - HOM absorber
 - Cryomodule
- Summary

The Compact ERL(cERL) for demonstrating ERL technologies

Before constructing large-scale ERL facility, we need to demonstrate the generation of ultra-low emittance beams using key devices.





Compact ERL

Parameters of the Compact ERL

	Parameters
Beam energy	35 - 245 MeV
Injection energy	5 MeV
Average current	10 - 100 mA
Acc. gradient (main linac)	15 MV/m
Normalized emittance	0.1 - 1 mm·mrad
Bunch length (rms)	1 - 3 ps (usual) ~ 100 fs (with B.C.)
RF frequency	1.3 GHz


※ blue numbers are parameters for initial stage

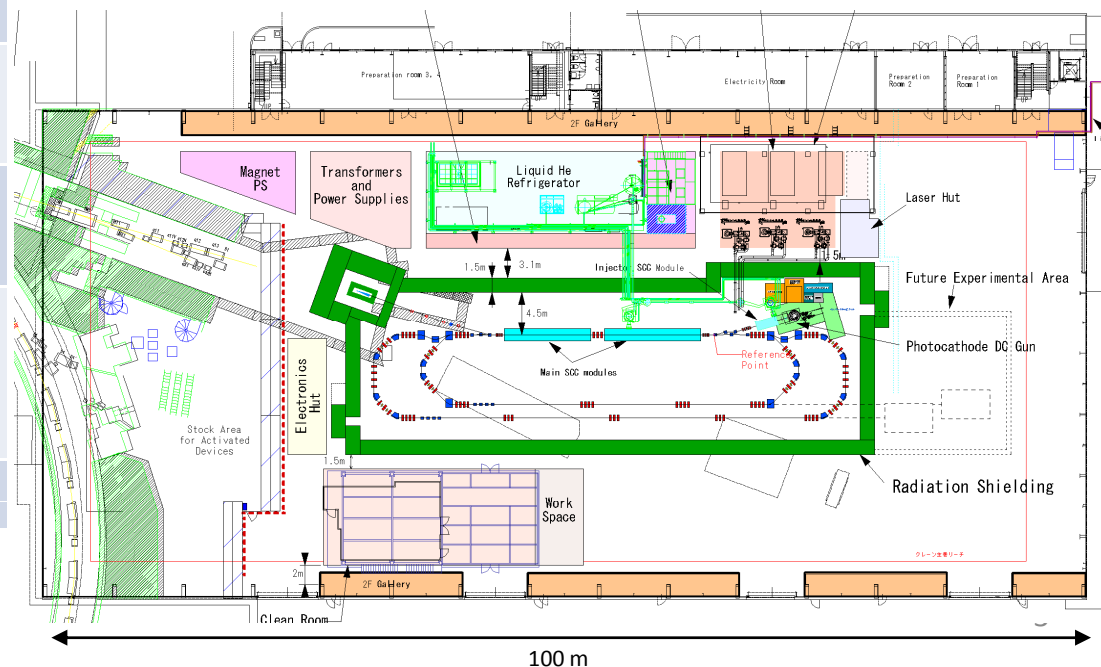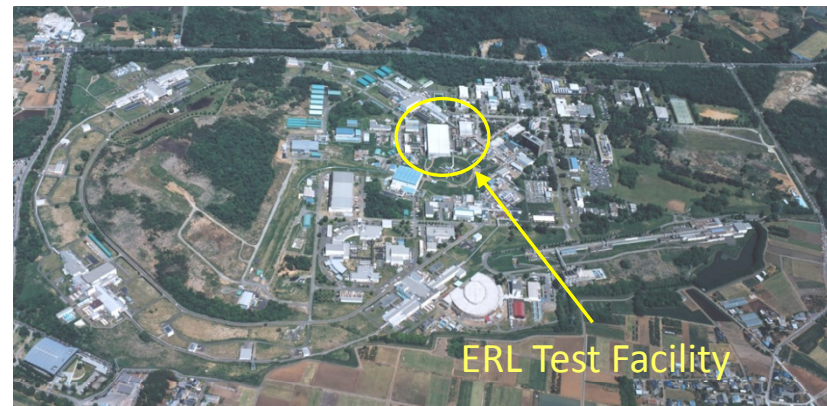

Current status of ERL Test Facility




2K refrigerator system

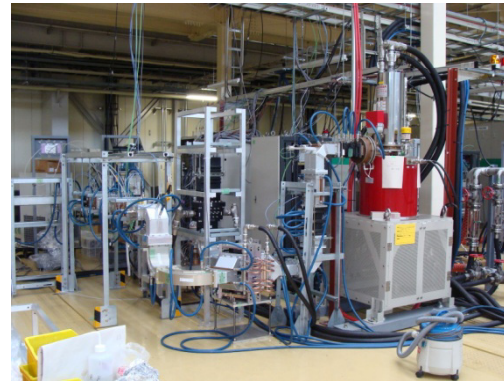

300 kW klystron

30 kW klystron and IOT


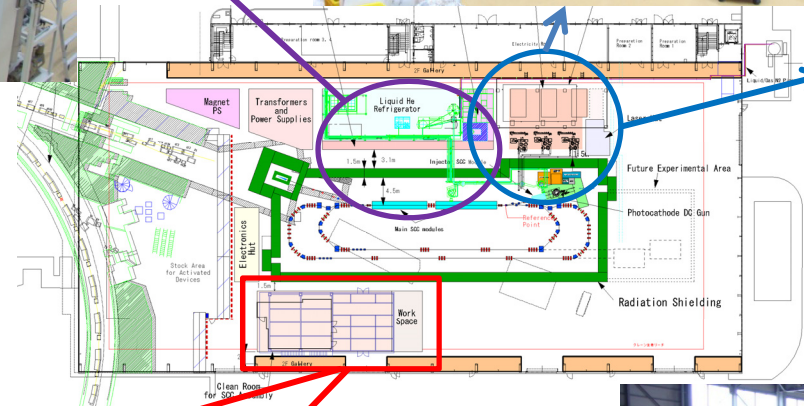


ERL Test Facility
from top of
cleanroom

Cleanroom for
module assembly



Cryomodule for cERL injector

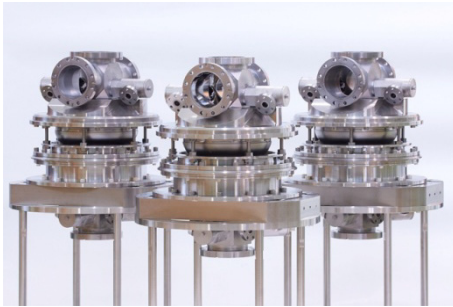


Input coupler
double feed
167kW/coupler




Cavity : 3 x 2-cell cavities
Slide-Jack tuner and piezo tuner

5 loop-type HOM
couplers for one cavity

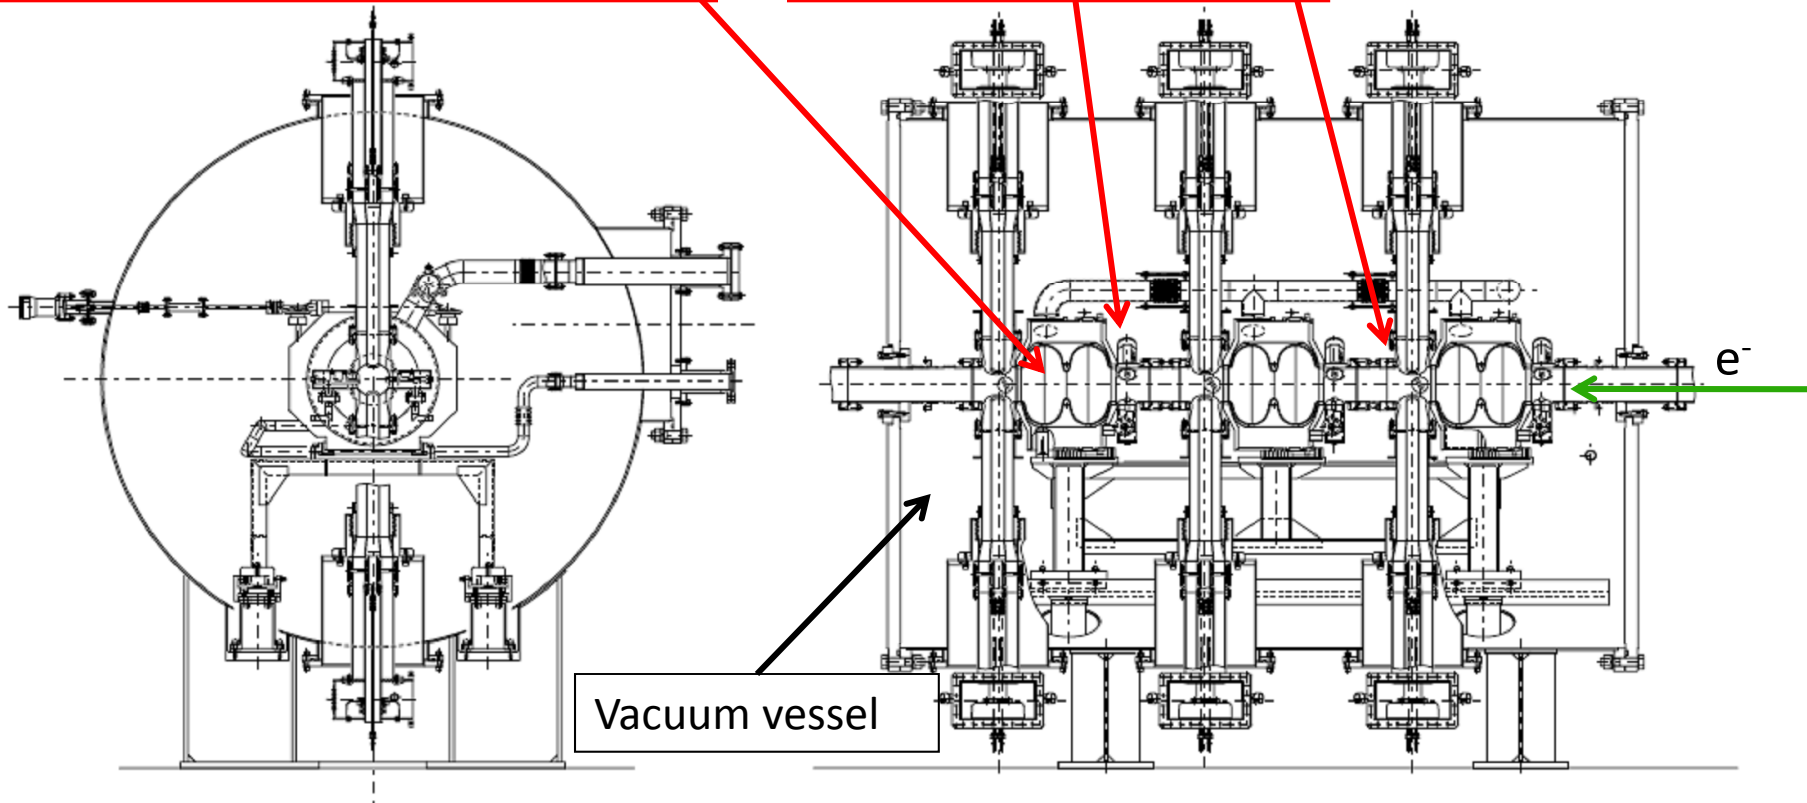


2-cell injector cavity

- 2-cell cavity with TESLA-like cell shape and enlarged beampipe
- Operation around 15 MV/m
- 5 loop-type HOM couplers per one cavity
- Fabricate #1, #2 prototype cavities and #3, #4, #5 cavities for operation


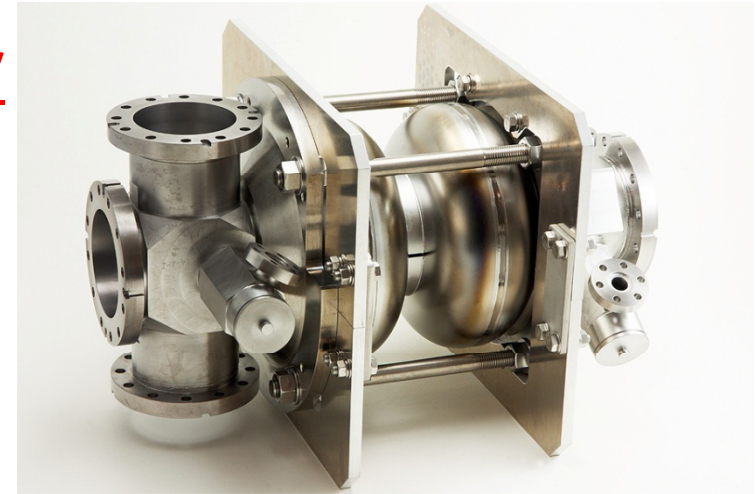


Vertical test results for #2 cavity

cERL 2-cell #2: Vertical test result with HOM pick-up

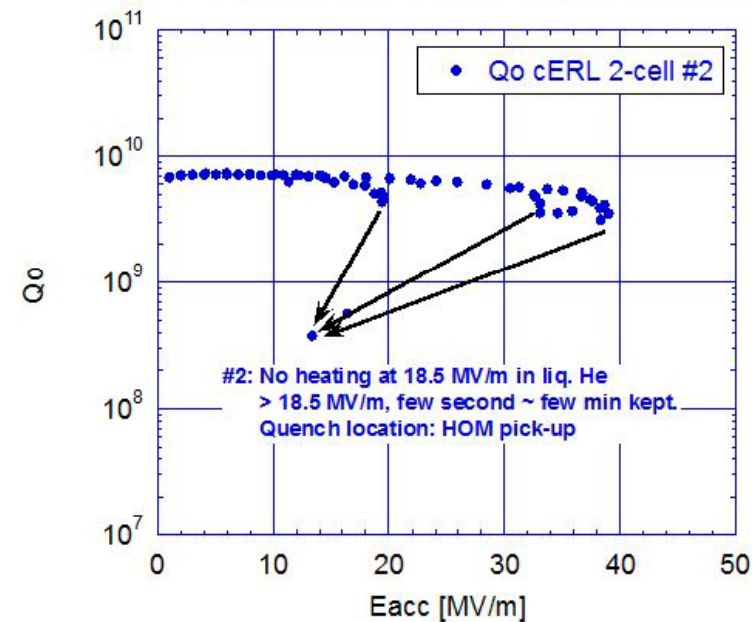


HOM coupler

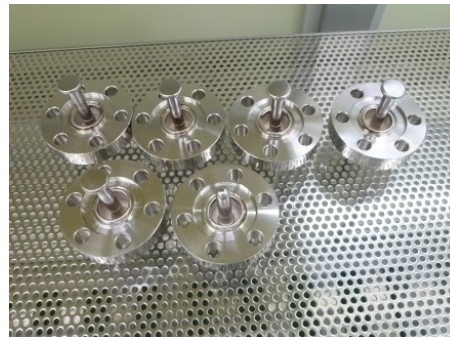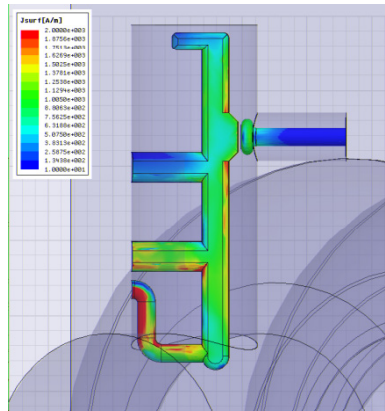


- Design is based on TESLA loop coupler
- Have heating problem for CW operation
- Added high pass filter to reduce magnetic field at tip of pickup antenna

- Heating occurred at HOM pickup probe
- Hard to keep high field at CW

Cooling of HOM coupler and cavity #3 VT results

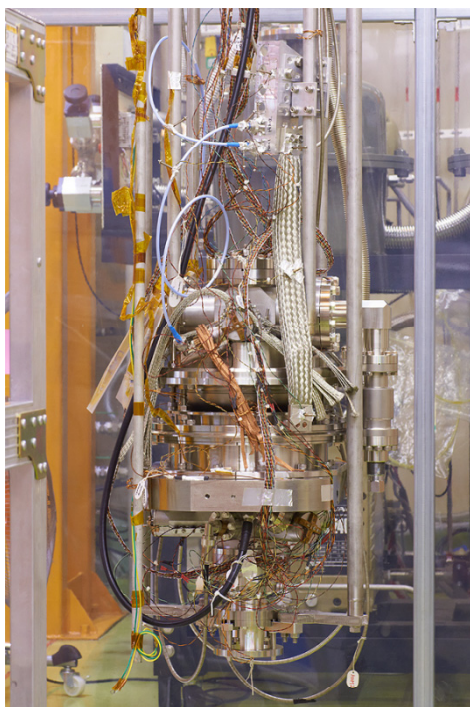

Setup of vertical test for 2-cell cavity

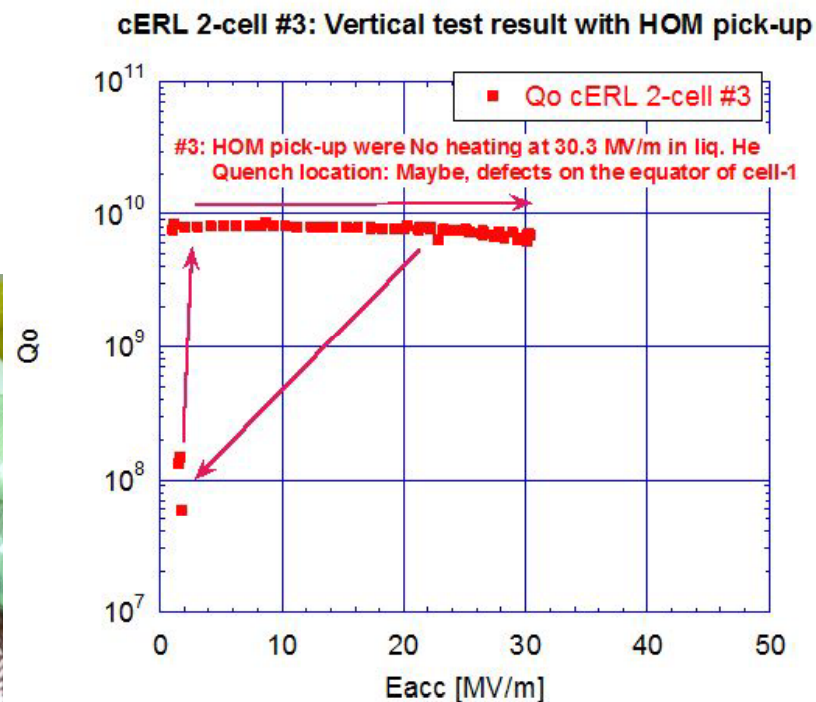

Enhanced cooling of HOM pickup

- Thermal anchor around HOM pickup connector.
- Thermal connection of antenna was improved using Indium seal.
- Polish antenna surface

- Field could be kept to be > 25 MV/m at CW, with the condition HOM coupler was out of He.



→ Enough for CW use of cERL.

- Further cooling study is on going
- Some R&Ds are going for feedthrough

input coupler

See FRIOA05
H. Sakai


- High current, 100mA, CW operation
→ $100\text{mA} \times 10\text{MV} = 1\text{MW}$!
→ 167kW/coupler with total 6 coupler
- Inner conductors and windows are water cooled.
- High power tests are performed, using 300 kW klystron.

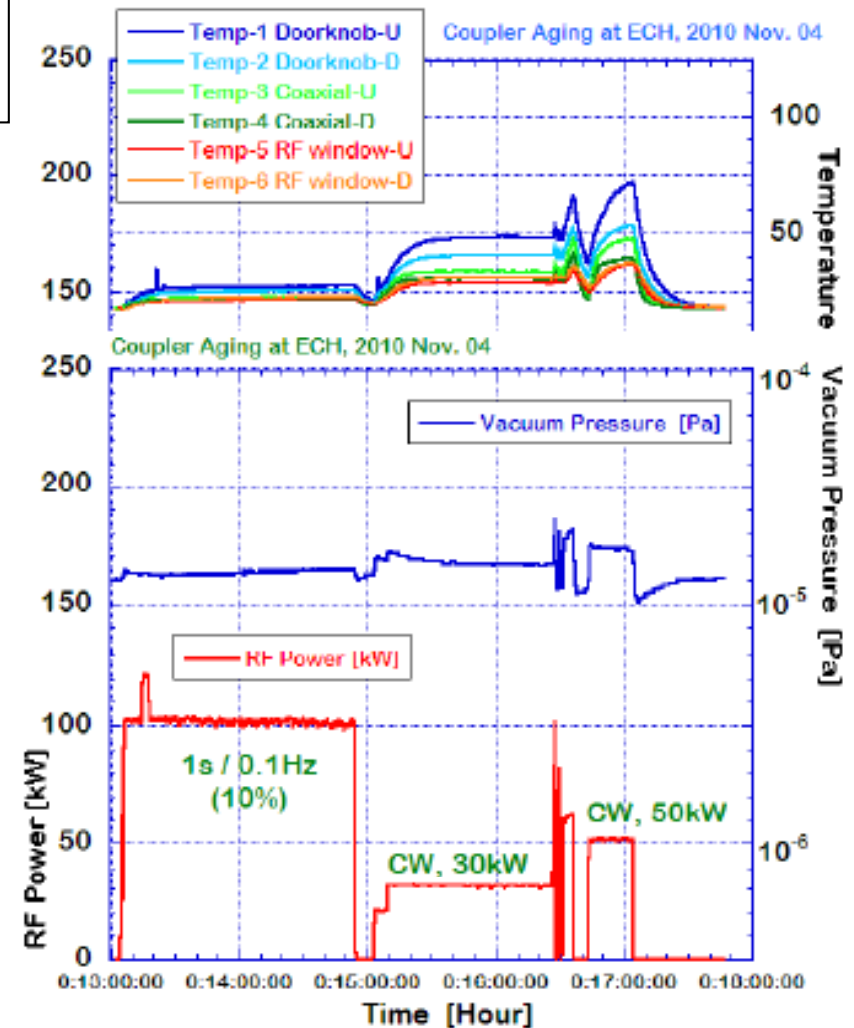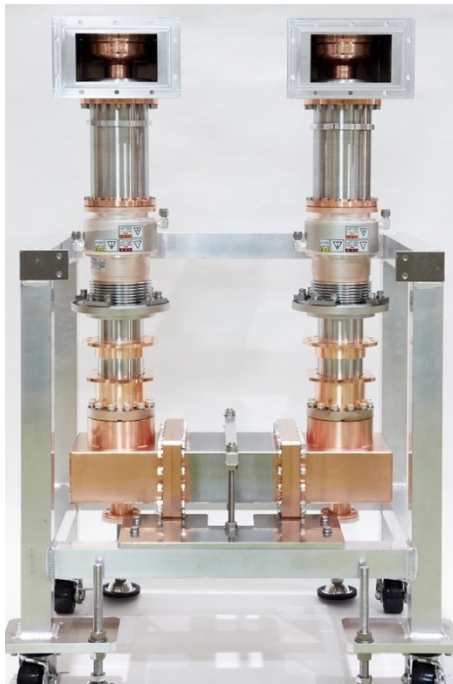

Results of conditioning

- 1 sec, 0.1Hz, 100kW (2 hours)
- CW 30 kW (1.5 hours)
- CW 50 kW (0.5 hours) with some heating
- CW 100 kW (1 minute)

ERL main linac

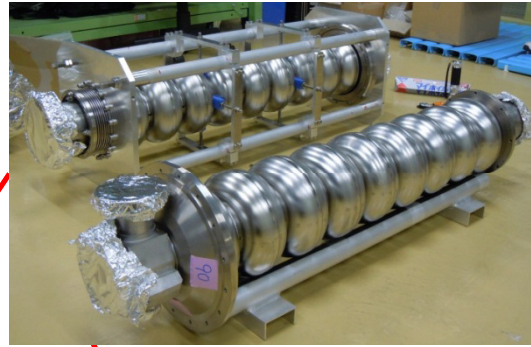


9-cell cavity

- HOM damped cavity shape
- $E_{acc}=15-20\text{MV/m}$
- 100mA CW
- Energy recovery

HOM damper

- Handle 150W HOM power
- Operation at 80 K
- HIP ferrite of new-type IB004
- Comb-type RF bridge

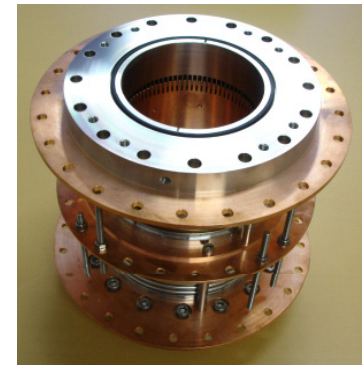

Input coupler

- 20kW CW (total reflection)
- Cold and warm window
- HA997 ceramic is used
- High power tests are performed




First module with two cavities
for cERL project

See poster
THPO034 E. Cenni



Results of vertical tests




#1 ERL 9-cell cavity

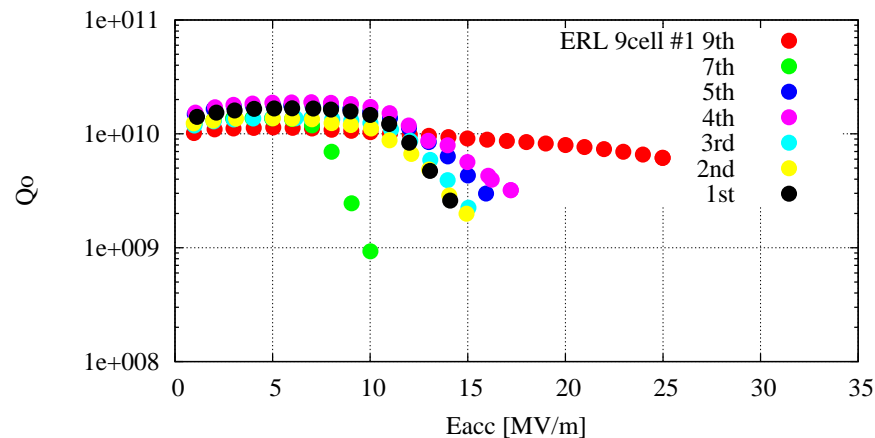

- Severe field emissions were observed
- Maximum Eacc was limited to 15 ~ 17 MV/m, until 8th measurements.
- At last, we got nice results, > 20 MV/m at 9th measurements.




#2 ERL 9-cell cavity (With Ti endplate, stiffener ring, NbTi flanges)

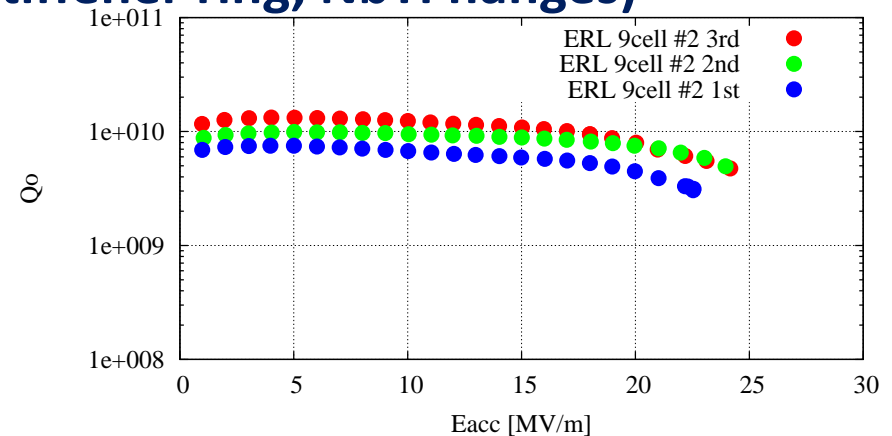


- Can reach to > 20 MV/m for both tests
- Field emissions were not so large

low Q value is due to SUS flanges, used after 5th measurement of #1 cavity
low Q value #2 cavity 2nd VT was recovered at 3rd VT, by just warming-up



Cavity diagnostics

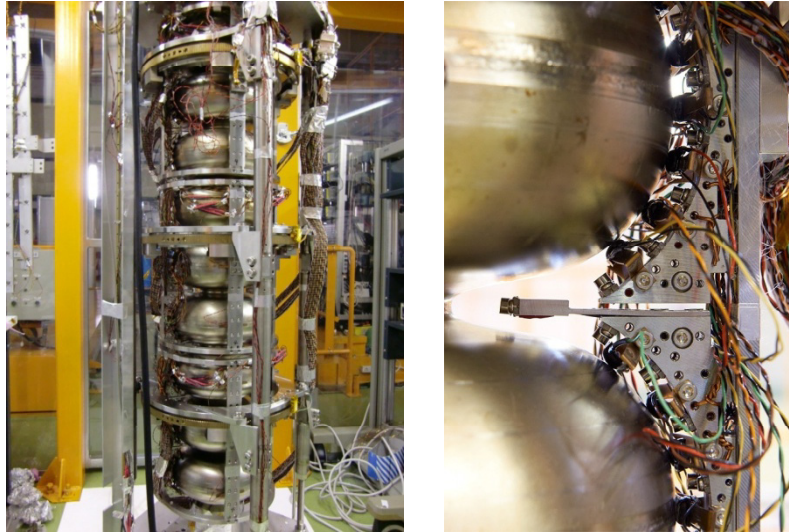


- Array of **Si diode** for X-ray detection and **carbon resistor** for temperature measurement
- They will rotate around cavity by using pulse motor

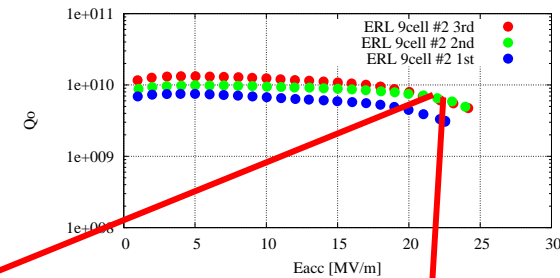


3rd VT for #2 cavity initial pi-mode (23MV/m)

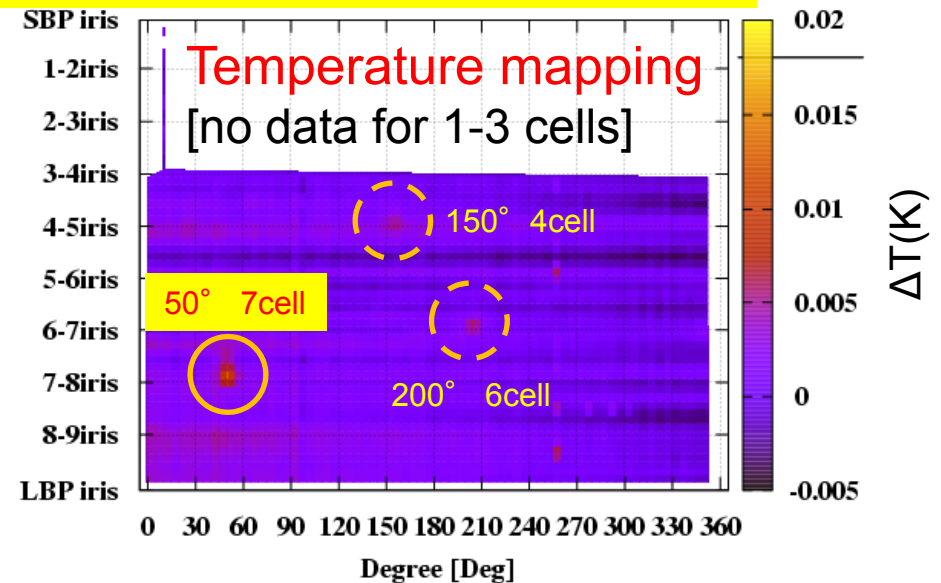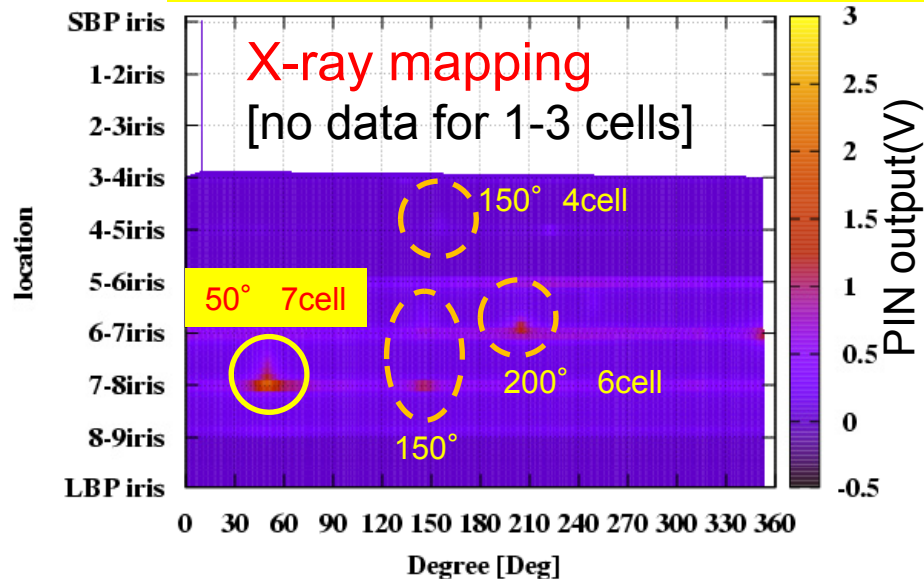

T-mapping (π -mode, 23 MV/m)

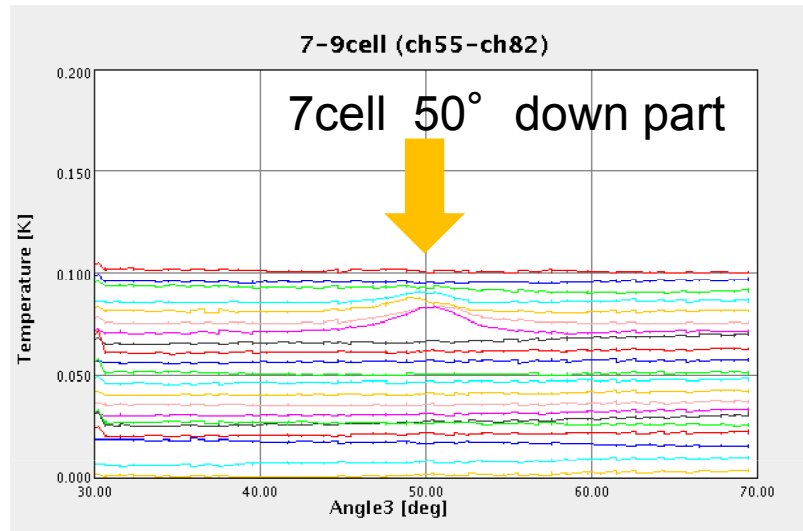



X-ray mapping (π -mode, 23 MV/m)

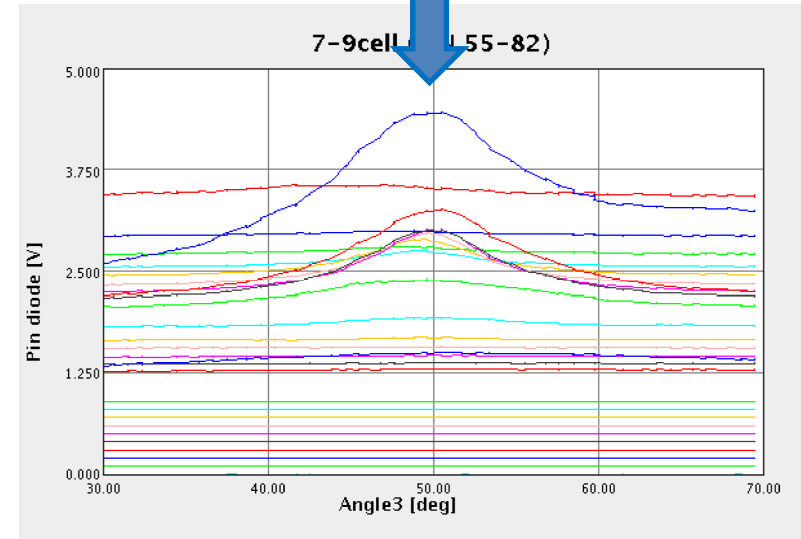

Observed X-ray trace and also temperature rise at same position!

Temperature rise at quench (#2 cavity, 3rd VT, π -mode, >25MV/m)

Eacc vs Delta T (pi-mode 2nd) (50deg) (7cell & 8cell)

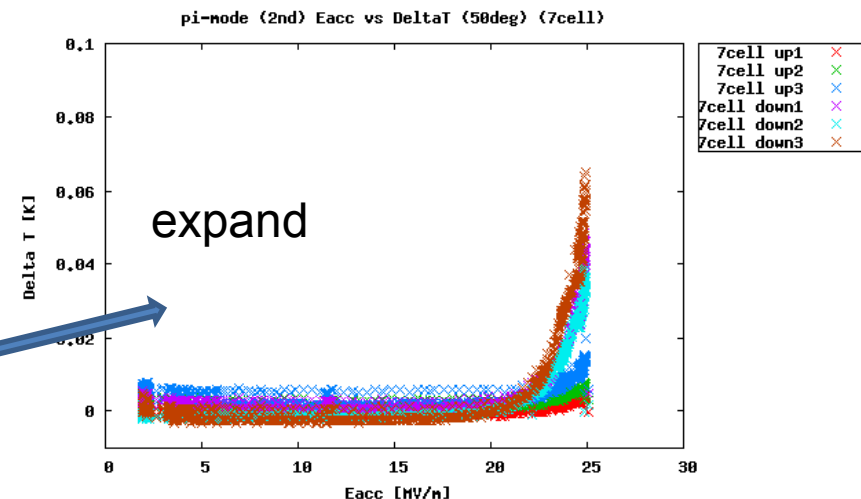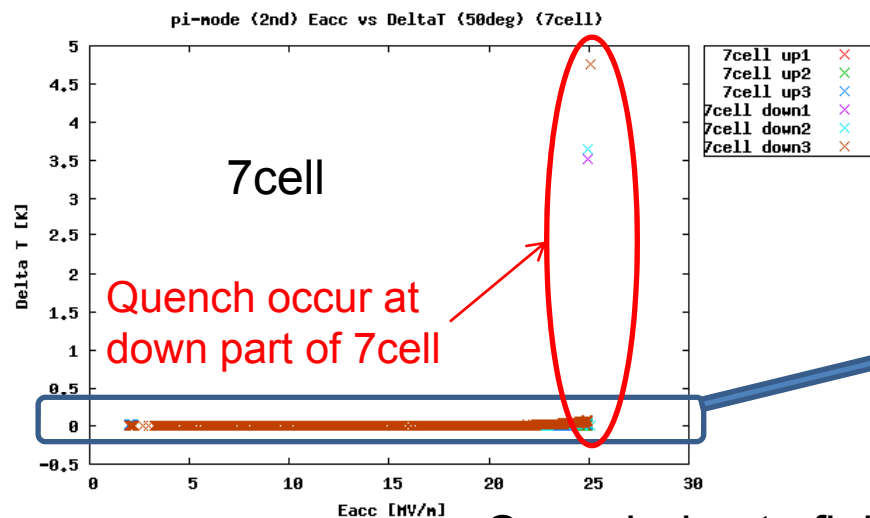

Quench due to field emission was detected

Development of input coupler for main linac

See TUPO005, FRIOA05 H. Sakai

Basic design

• Basic parameters

frequency : CW, 1.3GHz

Accelerating gradient : Max 20MV/m

input power : max 20kW , standing wave


loaded $Q(Q_L)$: $(1-4) \times 10^7$ (variable coupling)

• Points

Forced N2 gas cooling of inner conductor

Impedance 60Ω


99.7% purity of ceramic window are used.

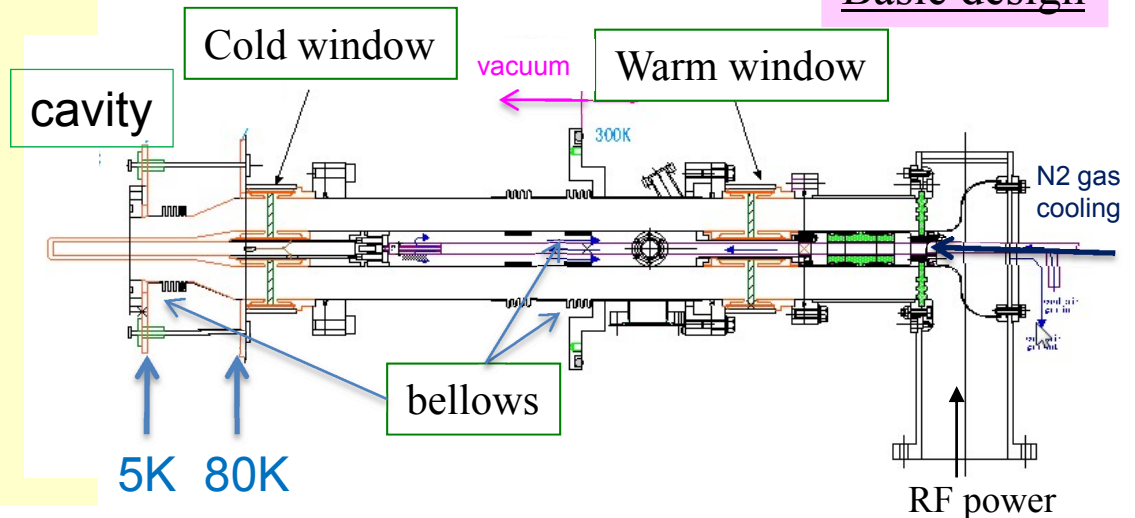


• High power test of prototype of input coupler under liquid Nitrogen cooling with vacuum insulator

Can keep 20kW power for 16hours with standing wave.


Finally achieve 25kW power feeding with standing wave.

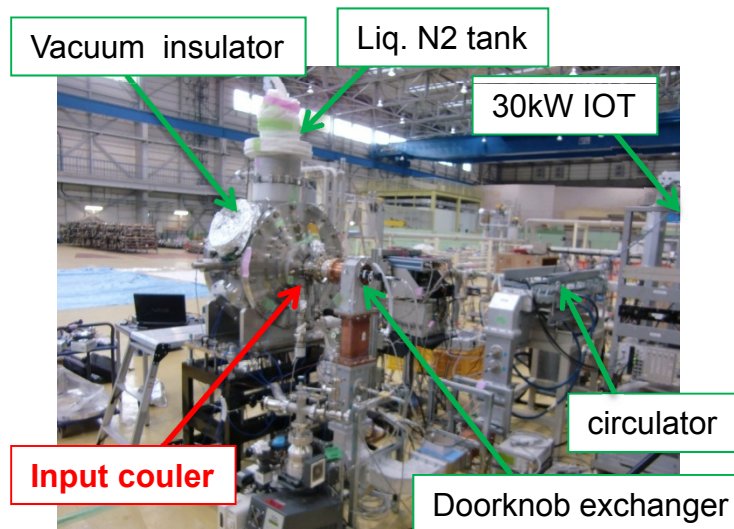

High power test setup with liquid Nitrogen

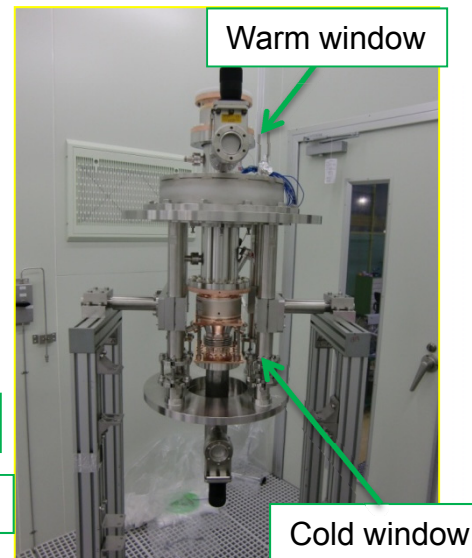

Prototype of input coupler

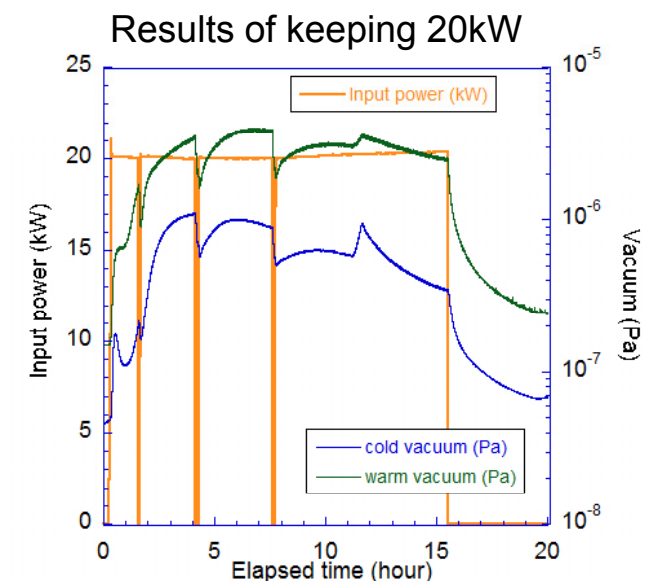

Sudden power down is mainly caused by noise of arc sensor.


See poster
TUPO003 M.Sawamura

HOM absorber

- HIP ferrite of new-type IB004
- Comb-type RF bridge

Cooling test at 80K


(using prototype without ferrite)

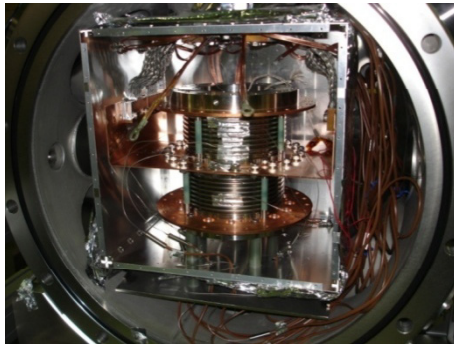

- Cooling ability against 100W HOMs was tested under 80K condition.
- Generally, it went well.
- Modification for Comb-shape to reduce thermal transmission.

Heat cycle test (RT – 80K)




(using prototype with ferrite)

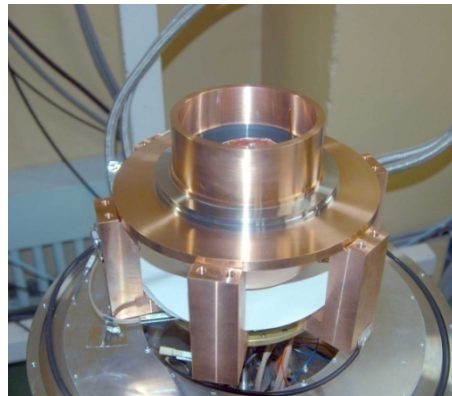

- Heat cycles, between RT to 80K, were applied to prototype HOM absorber.
- Some cracks were observed
- Details are under inspection


HOM measurement at RT

(using prototype with ferrite)

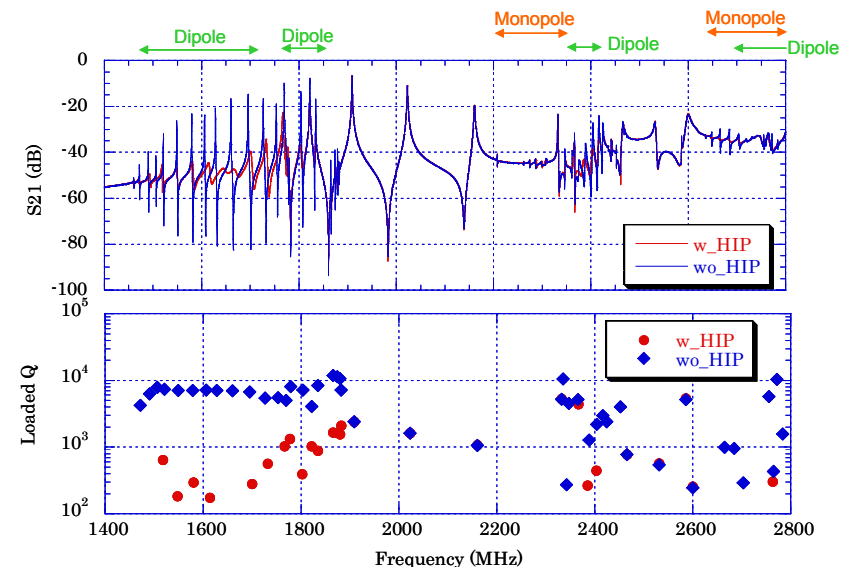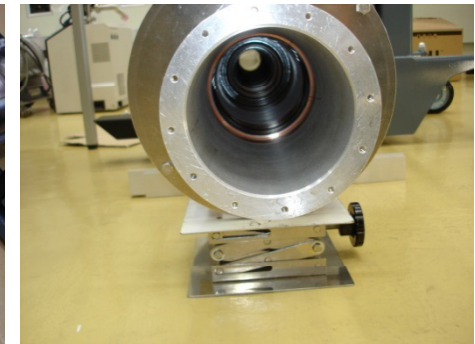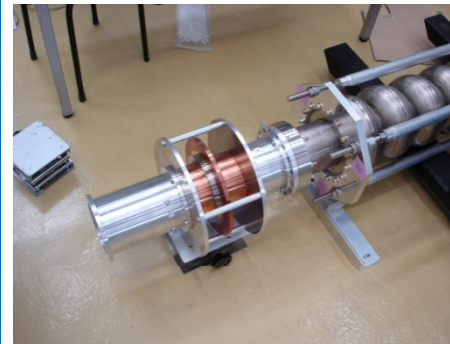

- Mounted on LBP side of #2 cavity, and measured at room temperature
- HOMs are sufficiently damped.



Cryomodule for main linac

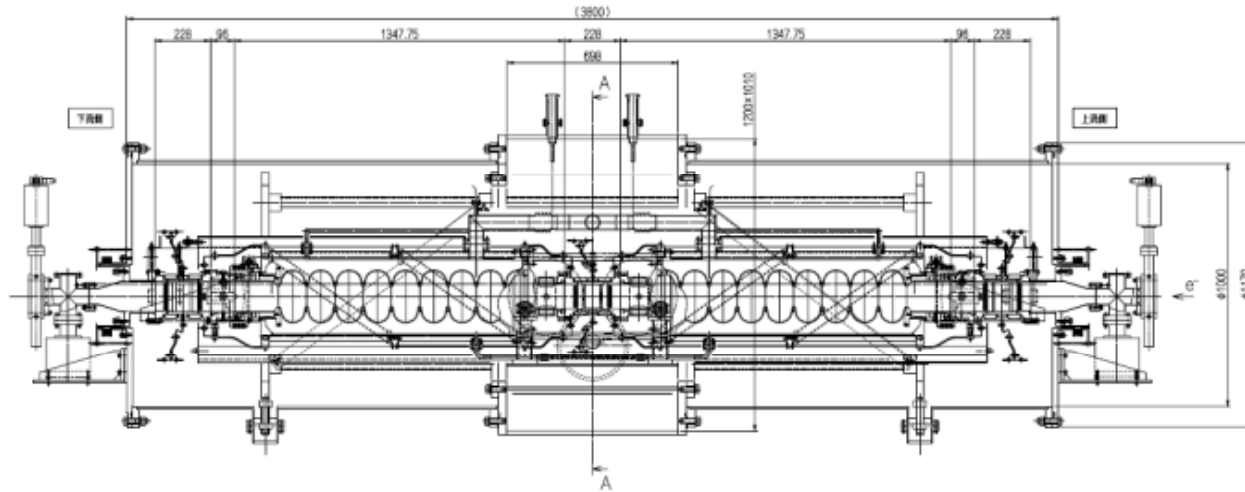

- Cryomodule is under construction.
- Two cavities were fabricated. They are under surface treatment
 - Vertical test from this autumn
- Two input couplers and three HOM absorbers are under fabrication.
- Slide-Jack type mechanical tuner and piezo tunes are applied
- Cryomodule will be assembled next year




Schedule

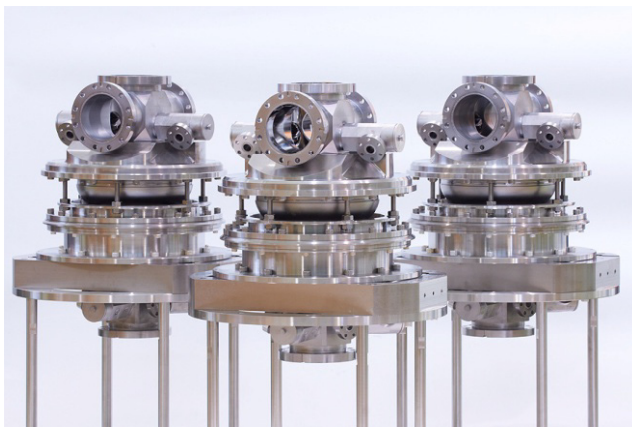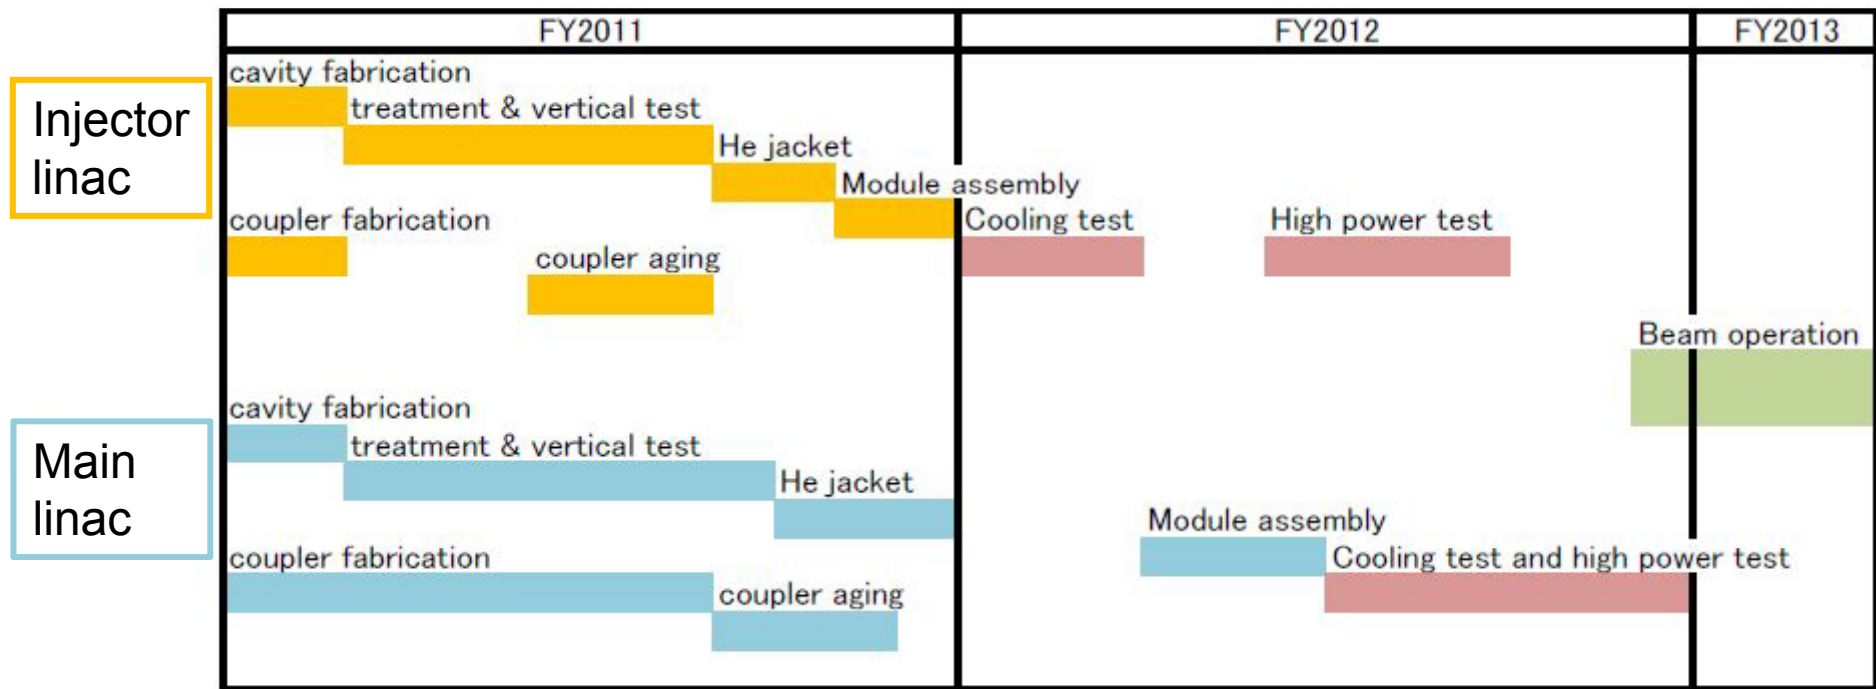


Summary

- cERL is under construction at ERL Test Facility in KEK.
- Injector linac
 - Cavity is ready. Heating problem at HOM pickup was improved and > 25 MV/m was achieved for CW operation.
 - Input coupler successfully passed 50 kW of CW power. For 100 kW and more, cooling should be improved.
- Main linac
 - Cavity reached to > 20 MV/m
 - Input coupler passed > 20 kW standing wave.
 - Several tests were done for HOM absorber.
- Both cryomodules will be constructed during 2012. After cooling test and high power test, beam operation will start.



ERL 2011
the 50th ICFA Advanced Beam Dynamics Workshop
on Energy Recovery Linacs

**The 50th ICFA Advanced Beam Dynamics Workshop
on Energy Recovery Linacs**



ERL 2011
the 50th ICFA Advanced Beam Dynamics Workshop
on Energy Recovery Linacs

The 50th ICFA Advanced Beam Dynamics Workshop on Energy Recovery Linacs

Co-hosted by KEK and JAEA, Japan

16-21 October, 2011

KEK, High Energy Accelerator Research Organization, Tsukuba, Ibaraki, Japan

Home

Welcome

Important Dates

Registration/Accommodation

For Participants

- ▶ Travel/Venue
- ▶ Reception/Banquet
- ▶ Excursion
- ▶ KEK Tour
- ▶ VISA

Scientific Program

Please join to ERL2011, which will be held at Tsukuba, October 16-21