

DESIGN CONSIDERATIONS OF A HIGH INTENSITY BOOSTER FOR PETRA IV

H.-C. Chao*, S. A. Antipov, I. Agapov, DESY, 22607 Hamburg, Germany

Abstract

A 6 GeV booster lattice with a high intensity capacity for the PETRA IV project is presented. Firstly the requirements and constraints are articulated. Due to the geometric constraints the ring will be installed in racks mounted on ceilings. Then following some design strategies of reaching high intensity limit, a lattice is designed and presented. The topics covering the linear optics, nonlinear dynamics, orbit correction, orbit bump, and some instability studies are investigated.

INTRODUCTION

The PETRA IV project [1,2] toward a diffraction limit synchrotron light source at 6 GeV features an ultra low emittance storage ring and a small dynamic aperture. Whether using on or off axis injection, the emittance of the injected beam must be very low. The current booster DESY II's emittance is 350 nm-rad at 6 GeV, which is too large for PETRA IV's injection. Therefore a new ring accelerator where the beams to-be-injected are prepared is always needed. This ring is named DESY IV. This article focuses on the booster option tuned for high intensity capacity with acceptable emittance.

DESIGN CONSIDERATIONS

Performance Requirements

The required charge to be delivered into the storage ring is as high as 8 nC per bunch. Considering losses during transfers, the single bunch intensity capacity requirement in DESY IV is adjusted higher as 10 nC. An additional challenge comes from the small required emittance. To be more specific, the proposed operation modes for the storage ring [2] demands the injector to deliver a 10 nC electron beam at 6 GeV with the emittance less than 30 nm-rad at a repetition rate of at least 1 Hz.

One should also be careful of the equilibrium bunch length at 6 GeV, which should be controlled within 2 cm for better storage ring injection efficiency.

The collective instabilities are usually more severe at low energies. Hence it is beneficial to increase the energy of the input beam, which is limited by the length of the current LINAC II tunnel. For this study, a reasonable assumption is made to set the input energy at 800 MeV.

Because of the on-axis injection, the degraded bunches in PETRA IV will be swapped by the full intensity bunches from DESY IV. The swapped-out bunches can be back-injected into DESY IV. There are two purposes for the back-injection. The first is to use DESY IV as an alternative for the beam dump system. It takes the swapped-out bunches,

ramps down the energy, and dumps it at low energy. The second purpose is to recycle the bunches to relax the workload of the electron gun. The capability to inject and accumulate beams at 6 GeV is optional but it will be included in the design phase.

Geometric Constraints

Due to the DESY's crowded site plan DESY IV has to be in the existing DESY's tunnel. The top view layout of an example ring of DESY IV together with DESY II in the existing tunnel is shown in Fig. 1.

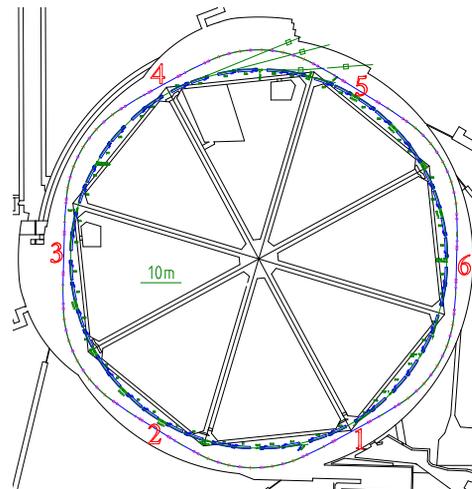


Figure 1: Layout of DESY IV (3h3l lattice) and DESY II in DESY tunnel.

The outer walls of the DESY tunnel are very round, while the inner walls has 8-fold symmetry. Other than DESY II, this old wide tunnel also accommodates the depreciated proton synchrotron DESY III which was constructed for the HERA project. It is concentric to DESY II and sits near the outer walls of the tunnel. DESY IV's circumference is chosen to be the same as DESY III ($C = 316.8$ m). Therefore the remaining components of DESY III will be removed to install DESY IV.

A racetrack or a square-track geometry would be problematic concerning the tunnel wall constraints. Hence a rounder shape of DESY IV is preferred. Considering the locations for the ports for the extraction and re-injection from PETRA IV, DESY IV's shape is toggled to have 6 straights. DESY IV has to be oriented in a way so that the extraction direction of DESY IV roughly aims at the injection position of PETRA IV.

The DESY IV's orbit will be in the same plane as that of PETRA IV, about 1.2 m above the DESY II level, with the

* hung-chun.chao@desy.de

Content from this work may be used under the terms of the CC BY 3.0 licence (© 2021). Any distribution of this work must maintain attribution to the author(s), title of the work, publisher, and DOI

Nonlinear Dynamics

The nonlinear dynamics are studied by the tracking program Elegant [5]. As a result, the on and off-momentum dynamic apertures are shown in Fig. 3.

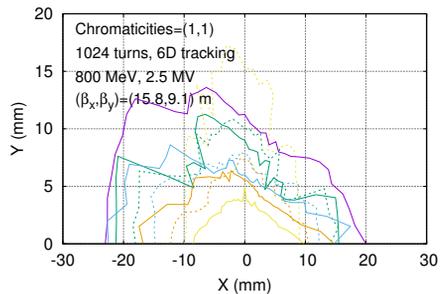


Figure 3: On-and-off momentum dynamic apertures.

The tune footprint with the diffusion rate and the tune shift with energies are simulated and shown in Fig. 4. If an universal physical aperture is subjected to 20 mm, the DA becomes 15 mm and the momentum aperture 5%.

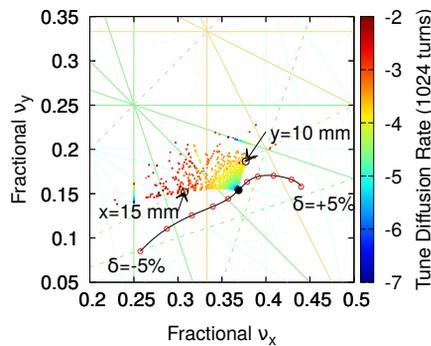


Figure 4: Fractional Tune Spread Footprint.

Orbit Correction

Different orbit correction schemes are tested in the following purposed location as shown in Fig. 5 [6]. An efficient configuration is found with 24 BPMs (at position label a, 2, 5, d) and 24 independent bi-directional correctors (at position label w, x, y, z). The max corrector strengths are within 0.5 mrad horizontally and 0.4 mrad vertically.

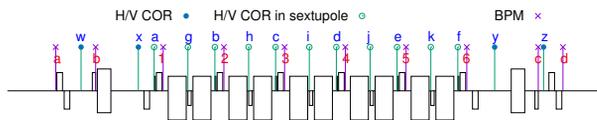


Figure 5: Some possible BPM and corrector locations (with labels) in one superperiod.

Straight Section Plan

The six straights are labelled in the layout in Fig. 1. Straight #1, #3, and #5 are the high beta straights, while the others are low beta straights dedicated for cavities. The

low energy injection and high energy extraction are integrated in Straight #1. A horizontal local orbit bump can be formed by a pair of bumpers at two locations with $\Delta\mu_x = \pi$. The kicker leverage at the straight center is 5.5 mm/mrad. A tentative configuration of the injection/extraction elements and the orbits is depicted in Fig. 6. To avoid conflicts of elements the injection has to go vertically and a Lambertson septa is used.

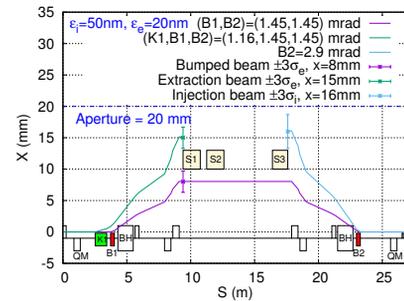


Figure 6: Orbits at injection/extraction straight.

Similar straights #3 and #5 are preserved for the injections of high energy beams. They could be from a future laser plasma wakefield accelerator [7], the DESY II synchrotron, or the recycled beam extracted from PETRA IV. The recycled beam will be re-injected into DESY IV in Straight #3.

SUMMARY

The criteria for the injector of PETRA IV are firstly articulated. Following a design strategy, a strong intensity limit booster is custom made for the PETRA IV project. The geometry is well-tailored to fit into the existing DESY tunnel. The orbit level is raised to be the same as PETRA IV so that the existing DESY II and its Test beamlines will not be altered.

Three low beta achromat straights provides enough space for RF modules. In contrast, the other 3 longer achromat straights has higher beta functions. Proper locations for efficient 2-kicker orbit bumps are found. The capability to accumulate the beam at high energies is possible. The low energy injection and high energy extraction can be integrated in one of these straights. In addition, the other two high beta straights are preserved for higher energy injection from other sources.

The input beam energy is raised to 800 MeV to improve the beam stability. The full intensity bunches or bunch trains will be on-axis injected into the storage ring by default. Furthermore, this ring can also be operated as a booster for possible top-up operation or being an accumulator at 6 GeV.

ACKNOWLEDGEMENTS

The authors would like to acknowledge our colleagues at DESY, especially D. Enfeld, Y.-C. Chae, R. Bartolini and R. Brinkmann for numerous discussions and assistance.

REFERENCES

- [1] C. G. Schroer *et al.*, “PETRA IV: the ultralow-emittance source project at DESY”, *J. Synchrotron Radiat.*, vol. 25 no. 5, pp. 1277-1290, 2018. doi : 10.1107/s1600577518008858
- [2] C. G. Schroer *et al.*, “PETRA IV: upgrade of PETRA III to the Ultimate 3D X-ray microscope. Conceptual Design Report”, Deutsches Elektronen-Synchrotron DESY, Hamburg, Germany, Rep. PUBDB-2019-03613, 2019.
- [3] R. Diener *et al.*, “The DESY II test beam facility”, *Nucl. Instrum. Meth. A*, vol 922, p. 265, April 2019. 10.1016/j.nima.2018.11.133
- [4] A. W. Chao, *Physics of Collective Beam Instabilities in High-energy Accelerators*, New York, USA: Wiley, 1993.
- [5] M. Borland, “elegant: A Flexible SDDS-Compliant Code for Accelerator Simulation”, ANL, IL, USA, Advanced Photon Source Rep. LS-287, Sep. 2000.
- [6] H. C. Chao *et al.*, “Comparison of DESY IV Lattice Family 3h3l”, DESY internal report, in preparation.
- [7] S. A. Antipov *et al.*, “Design of a 500 MeV prototype laser-plasma injector for DESY-II”, presented at the 12th Int. Particle Accelerator Conf. (IPAC’21), Campinas, Brazil, May 2021, paper TUPAB025.