EXPERIMENTAL STUDY OF THE TIME DEPENDENCE OF THE ACTIVITY OF DELAYED NEUTRONS IN THE FISSION OF ^{235}U BY NEUTRONS FROM THE REACTION ^{7}LI(P, N) ON THE ELECTROSTATIC ACCELERATOR EG-1

K.V. Mitrofanov, V.M. Piksaikin, A.S. Egorov, V.F. Mitrofanov, D.E. Gremyachkin, B.F. Samylin, State Scientific Center of Russian Federation Institute of Physics and Power Engineering, Obninsk, Russia

Abstract

In the present work the installation created on the basis of the accelerator EG-1 (IPPE) for the experimental studies of the time dependence of delayed neutron activity from neutron induced fission of ^{235}U is described. Measurements were carried out with neutron beam generated with the help of the ^{7}Li(p,n) reaction. The lower limit of the investigated time range was governed by the proton beam switching system that was 20 ms. It was shown that the temporary characteristics of delayed neutrons from the fission of ^{235}U by epithermal neutrons is consistent with the time dependence which at present is recommended as a standard. In case of the fast neutron induced fission of ^{235}U the measured decay curve of delayed neutrons shows excess of counting rate in the time interval 0.01-0.2 s as compared with the decay curve corresponding to the recommended data.

Experiment was carried out at the accelerator IPPE EG-1. Block scheme of the experimental setup is shown in Figure 1.

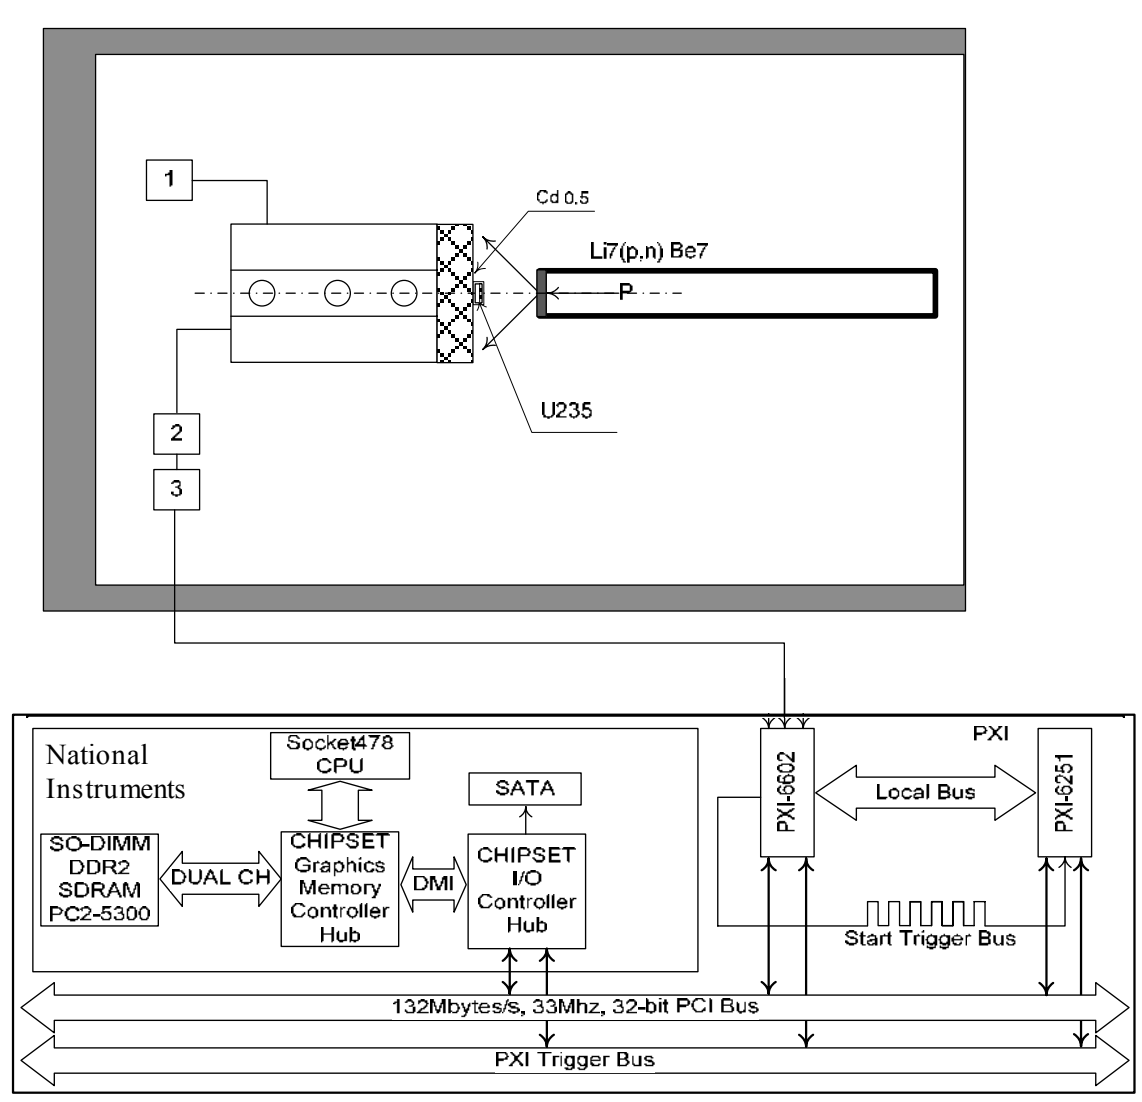

Figure 1: Block scheme of the experimental setup is performed on the basis of the system of accumulation of National Instruments. 1 – high voltage source; 2 – preamplifiers of signals from the counters SNM-18; 3 – summator of signals from the preamplifier of detector counters.

The neutron detector is an assembly of three counters SNM-18 (working gas: a mixture of 97% He-3 + 3% Ar. The pressure of 405 kPa) mounted in a polyethylene box. Signals from the counters SNM-18 received consistently to preamplifiers, amplifiers and conditioners. TTL signals received on the adder were formed at the output of the last, combined into a single digital stream of information transmitted by electronic analysis system and accumulation.

In this work, the neutron detector was set up, in which the effect of the distortion of the counting characteristics was absent at the initial time after irradiation session. In addition, the counting characteristics of the detector is not distorted even during irradiation intense beam of neutrons generated in the lithium target under the action of protons. The neutron source was a lithium target irradiated by a proton beam. The current in the experiment was 10 µA. The proton energy was 2.6 MeV.

There were two types of experiments. In the first experiment, the irradiated sample was placed on a side surface of a neutron detector. In a second experiment, a ^{235}U sample was placed in cadmium cover and a lead shield was placed between the detector and the sample. Obviously, in the first experiment, the neutron spectrum is significantly softer than the case of experiment №2, because the direct beam of the neutrons from the target is added the neutrons scattered by the material of the neutron detector. In the second experiment, a sample of ^{235}U is at a distance of 5 cm from the detector, and the scattered neutron at the detector are intensity absorbed by cadmium filter. Lead filter is designed to shield the detector from the possible detection of delayed gamma rays from the sample ^{235}U. A sample of ^{235}U is a metal disk of 3 mm thickness and 41 mm in diameter, located in a metal shell. Measurements in the experiments were carried out for two different irradiation times – 180 s and 15 s. The experimental method used in this experiment based on the cyclic irradiation of fissile samples in a neutron flux of Li(p,n) reaction and the measurement of the time dependence of the delayed neutron activity [2].

THE FIRST EXPERIMENT

To verify the correct operation of all the experimental equipment (neutron detector with a registration tract, the electronic data storage system) the obtained data were processed to evaluate the time parameters of the delayed neutron. The estimation of parameters of the delayed

ISBN 978-3-95450-170-0

neutron performed by an iterative least-squares method [3]. The evaluation was carried out as part a 6-group model of time parameters of the delayed neutron. The obtained data are presented in Table 1. The table shows the analogous data from Kipin work [5]. The value of the average half-life obtained in the present work is the same as the corresponding recommended data [4].

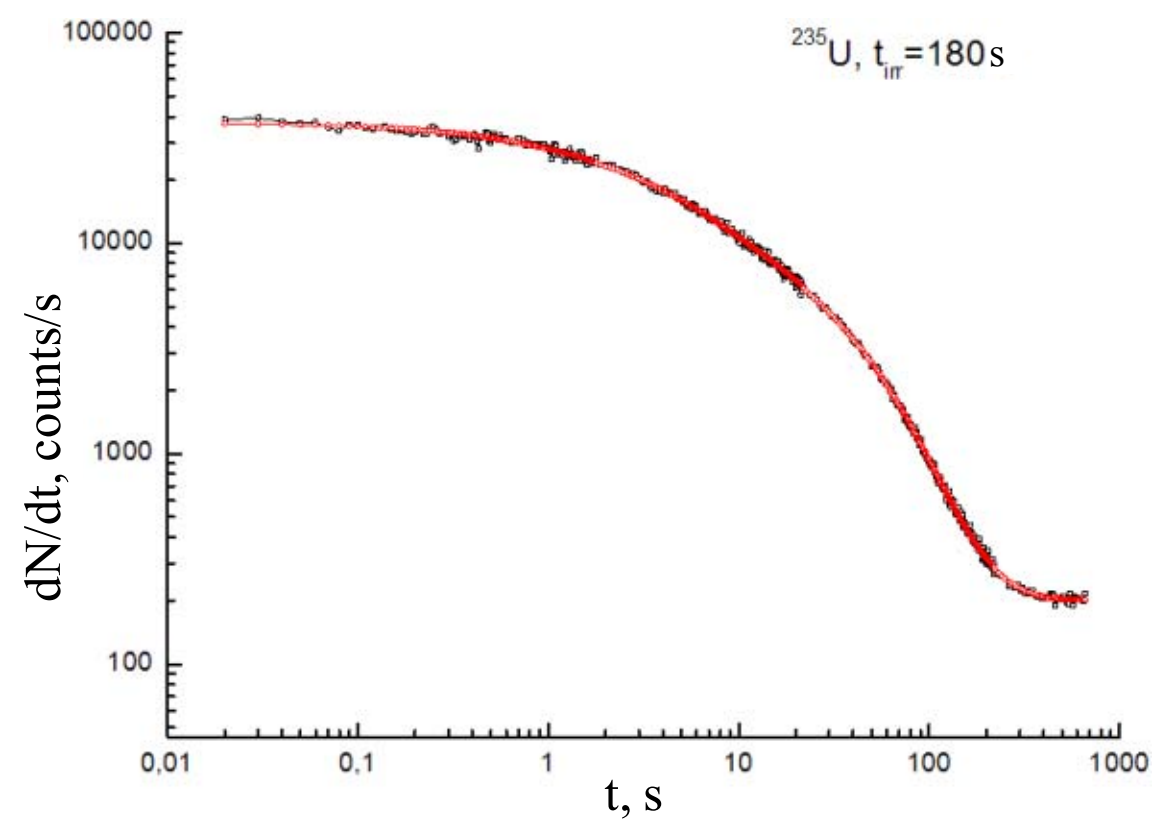

Figure 2: Time dependence of the activity of the ^{235}U sample obtained in experiments №1 with irradiation time of the sample tirr = 180 s, presented as a count rate.

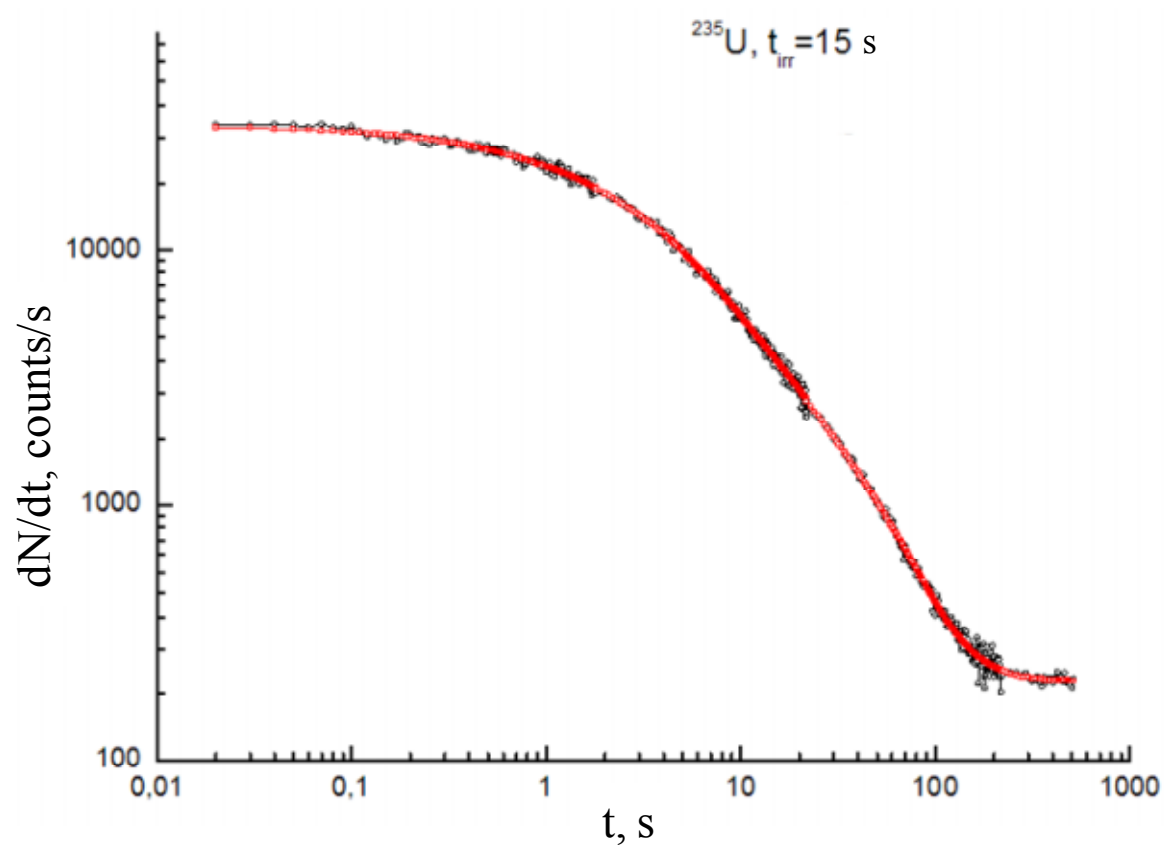

Figure 3: Time dependence of the activity of the ^{235}U sample obtained in experiments №1 with irradiation time of the sample tirr = 15 s, presented as a count rate.

The Figures 2 and 3 show that in this configuration the experimental data for the time of irradiation tirr = 15 do not show a significant excess of delayed neutron activity at the lower boundary of the investigated time range (0.01-0.5 s) as in the case of long irradiation (tirr = 180).

THE SECOND EXPERIMENT

Figure 4 shows that data of experiment №2 indicate the excess of count numbers in the low times in relation to the recommended data [4]. Similar results were obtained in experiments with a configuration corresponding to a fast spectrum of primary neutrons for the irradiation time of the sample tirr = 15 s. These data are presented as the count rate of pulses from a neutron detector in Figure 5. It is seen that there is an increase the count rate of delayed neutrons in the times region up to 0.12 s compared with the data obtained on the basis of the recommended data. The recommended data were measured in the time range starting from 0.1 s.

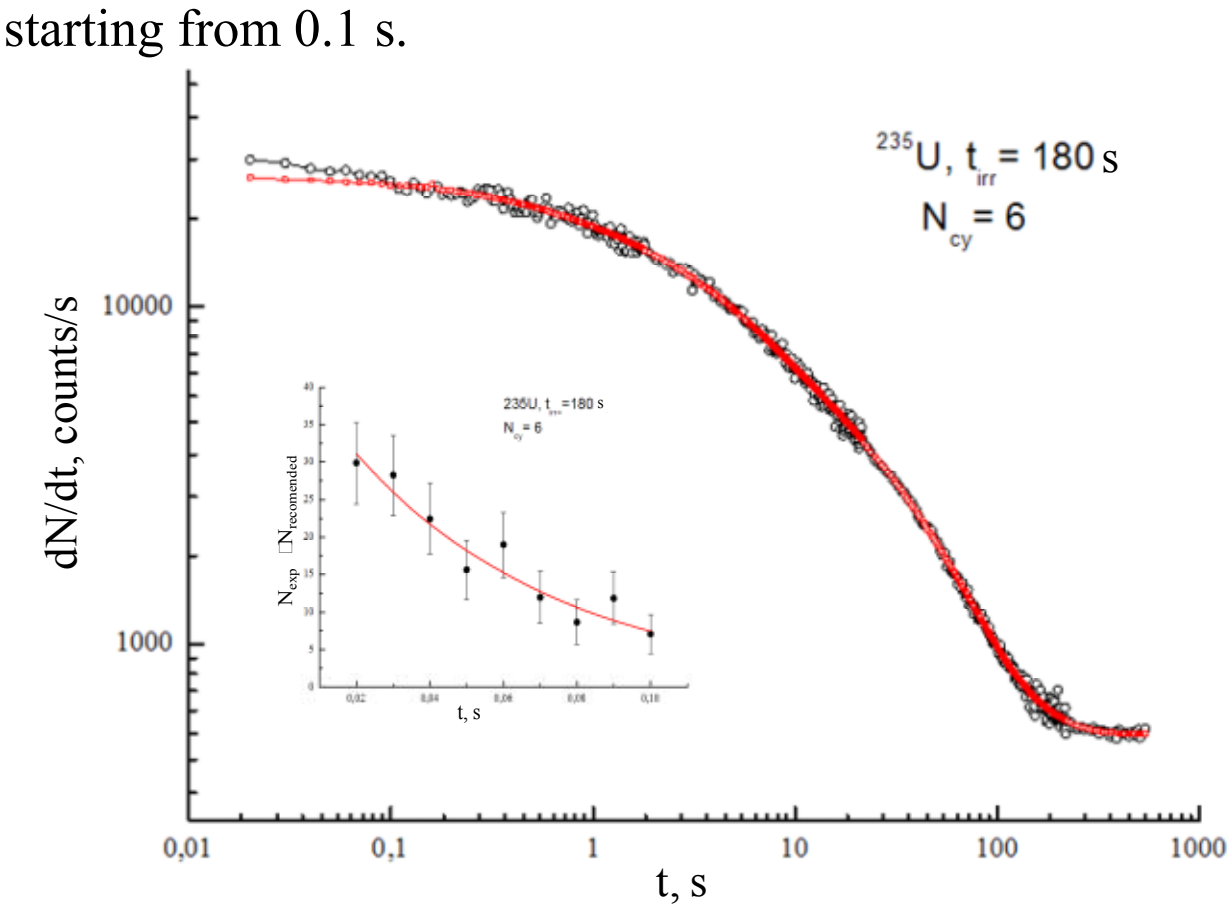

Figure 4: Time dependence of the activity of the ^{235}U sample obtained in experiments №2 with irradiation time of the sample tirr = 180 s, presented as a count rate.

Thus, it was shown in the experiment that the measured time dependence of delayed neutron activity for soft neutrons agrees with the recommended one. As for the fast spectrum of primary neutrons the excess of count numbers is observed on the decay curve in the time range of 0.01 - 0.2 s as compared to the decay curve corresponding to the recommended data.

Table 1. Relative yields and periods of delayed neutrons in the fission of ^{235}U by neutrons from the reaction ^{7}Li (p, n).

№		1	2	3	4	5	6	$T_{1/2}$ cp
^{235}U (present work, fast spectrum)	a_i	0.03950 ± 0.00131	0.20823 ± 0.00692	0.19670 ± 0.00881	0.38126 ± 0.01501	0.14655 ± 0.00692	0.02776 ± 0.00139	8.90932 ± 0.48652
	T_i	54.12201 ± 1.01994	22.38173 ± 0.29337	6.09608 ± 0.22313	2.2432 ± 0.05674	0.45424 ± 0.02208	0.17896 ± 0.00894	
^{235}U Kipin (fast)	a_i	0.038	0.213	0.188	0.407	0.128	0.026	8.83
	T_i	54.51	21.84	6.0	2.23	0.496	0.179	

ISBN 978-3-95450-170-0

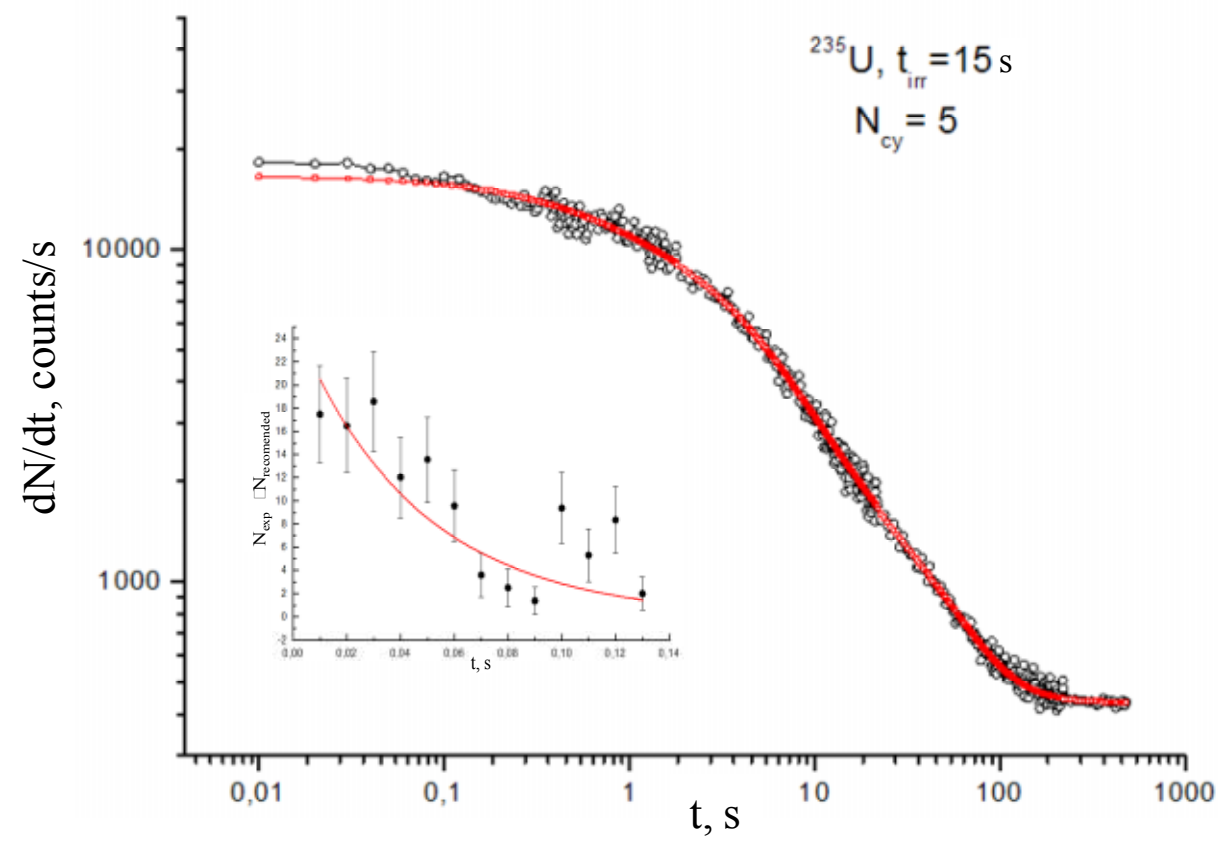

Figure 5: Time dependence of the activity of the ^{235}U sample obtained in experiments №2 with irradiation time of the sample tirr = 15 s, presented as a count rate.

In this work, the set-up was created on the basis of the accelerator EG-1 IPPE allowing to measure the activity of delayed neutrons of fission of heavy nuclei in the time range, which the lower limit is determined by the speed of the charged particle beam interruption. It was shown in the experiments that the measured time dependence of delayed neutron activity in the fission of ^{235}U on the soft spectrum of primary neutrons agrees with the recommended one. As for the fast spectrum of primary neutrons the excess of count numbers is observed on the decay curve in the time range of 0.01 - 0.2 s as compared to the decay curve corresponding to the recommended data.

The microscopic approach using the data on the probability of emission of delayed neutrons and cumulative yields of fission products for 368 nuclei precursors also indicates the existence of short-lived component ($T_{1/2}$ <0.2 s) in the decay curve of activity of delayed neutrons emitted in the fission of ^{235}U.

REFERENCE

[1] http://www.ni.com/pdf/products/us/4daqsc386-393_386-387.pdf

[2] V.M. Piksaikin, N.N. Semenova. “A method and setup for studying the energy dependence of delayed neutron characteristics in nuclear fission induced by neutrons from the T(p, n), D(d, n), and T(d, n) reactions.” Nuclear experimental technique, Vol. 49, pp. 765-777, 2006.

[3] V.M. Piksaikin, L.E. Kazakov. “Energy dependence of relative abundances and periods of delayed neutrons from neutron-induced fission of ^{235}U, ^{238}U, ^{239}Pu in 6- and 8-group model representation.” Progress in nuclear energy, Vol. 41, pp. 203-222, 2002.

[4] G. Spriggs, J. Campbel, V. Piksaikin. “An 8-group delayed neutron model based on a consistent set of half-lives.” Progress in nuclear energy. Vol. 41, pp. 223-251, 2002.

[5] G.R. Kipin “Physical basis of the kinetics of nuclear reactors”. Atomizdat, 1967.

ISBN 978-3-95450-170-0