

28 June 2021 – 02 July 2021

# Fabrication Process of Single Spoke Resonator Type-2 (SSR2) for RISP

Myung Ook Hyun, Jongdae Joo, Hoechun Jung, Youngkwon Kim, RISP/IBS, Daejeon, Republic of Korea Dong-Keun Lee, Woong-Sik Choi, Vitzrotech, Ansan, Republic of Korea.

#### Abstract

Rare Isotope Science Project (RISP) in the Institute of Basic Science (IBS), South Korea, is now constructing superconducting linear accelerator 3 (SCL3) for low-energy beam experiment and also making prototypes of superconducting cavity, RF power coupler, tuner, and cryomodule of superconducting (SC) linear accelerator 2 (SCL2) for high-energy beam experiment. Single spoke resonator type-1 (SSR1) and type-2 (SSR2) superconducting cavities are now on the prototyping stage, which is applied a "balloon-variant" concept invented by TRIUMF. This paper explains about SSR2 fabrication process from press-forming to electron beam welding (EBW) with RRR300 niobium sheets.

## Introduction


RISP linac is composed with two sections, one is the low-energy acceleration region which includes the low-beta SC cavity – QWR and HWR - and the other is high-energy acceleration region which includes high-beta SC cavity – SSR1 and SSR2. SSR1/2 have each 0.3/0.51 beta and both single-spoke type, made by high-purity niobium material and covered by STS316L material liquid helium (LHe) jacket. This paper explains about the fabrication process of SSR2 SC cavity.

#### SSR2 Sub-part Attachment

Sub-part and final EBW are proceeded with high vacuum degree lower than 5E-6 mbar. And, for installation LHe jacket to the SC cavity, every stainless steel flanges are attached to the pure niobium pipes with vacuum braze. Figure 5 shows the half shell assembly after sub-part EBW.


## SSR2 RF Stack-up and Final EBW


For adjusting target frequency before shell-to-shell EBW, RF stack-up test should be proceeded with two half shell weldments and 1 spoke weldment. Figure 6 shows the RF stack-up process. Half shell weldments were trimmed symmetrically and carefully with frequency measurement, and when measured frequency meet to the target value, shell-to-shell EBW was proceeded. After shell-to-shell EBW, RF port holes were machined and shell-to-RF port EBW was proceeded. Figure 7 and 8 show the RF port assembly before and after EBW. Spoke-collar was also trimmed and welded by EBW, and final EBW was finished after trimming and assembling.

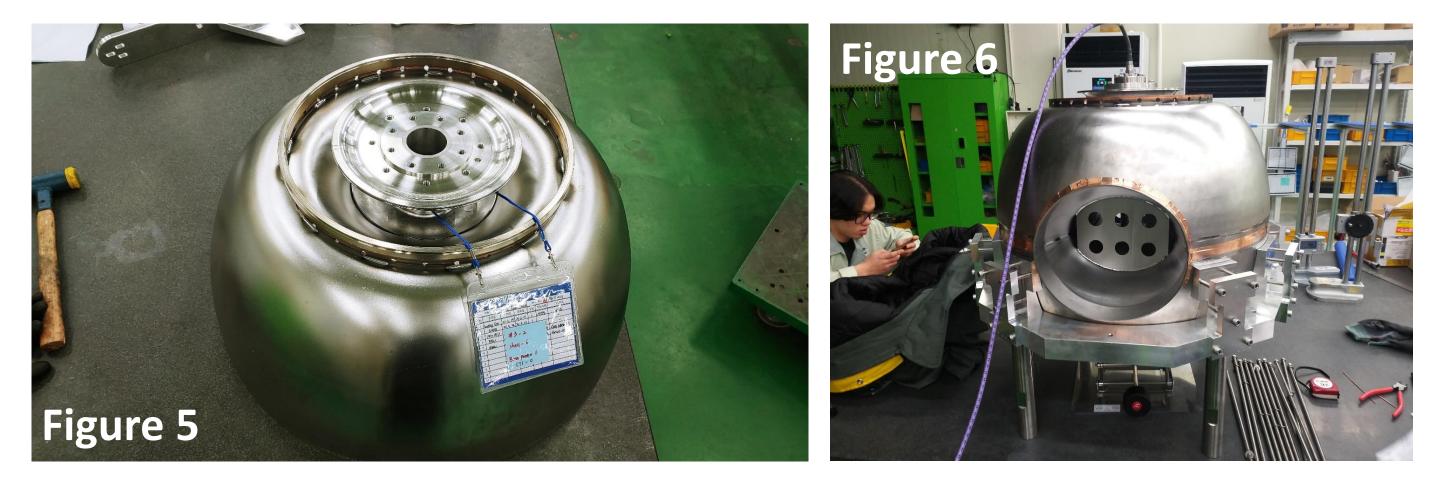


#### SSR2 Design Model

The design concept of SSR2 is based on the "balloon-variant" concept which is proceeded by the prototyping contract between RISP and TRIUMF. TRIUMF invented the balloon-variant concept which has higher multipacting suppression performance with the expected acceleration gradient over 9MV/m and target Q value over 5E9. The SC cavity development engineers of RISP have developed the engineering design of SSR2 since 2017, and RISP contracted with domestic vendor for making six SSR2 SC cavity prototypes. Figure 1 shows the exploded view of SSR2 SC cavity.

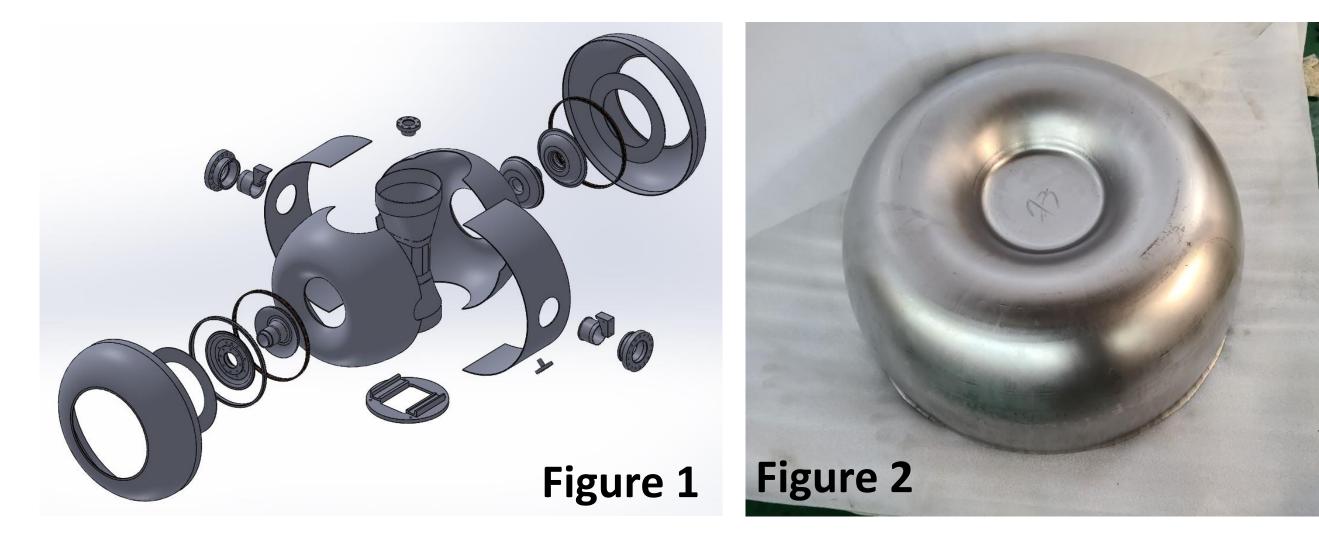

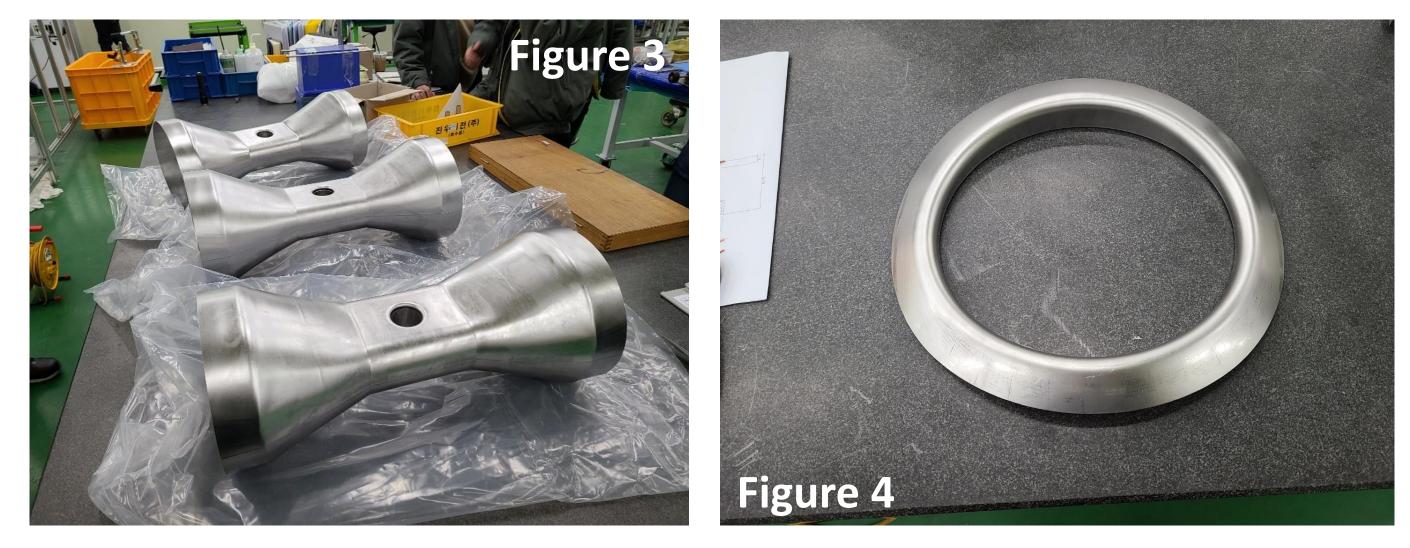

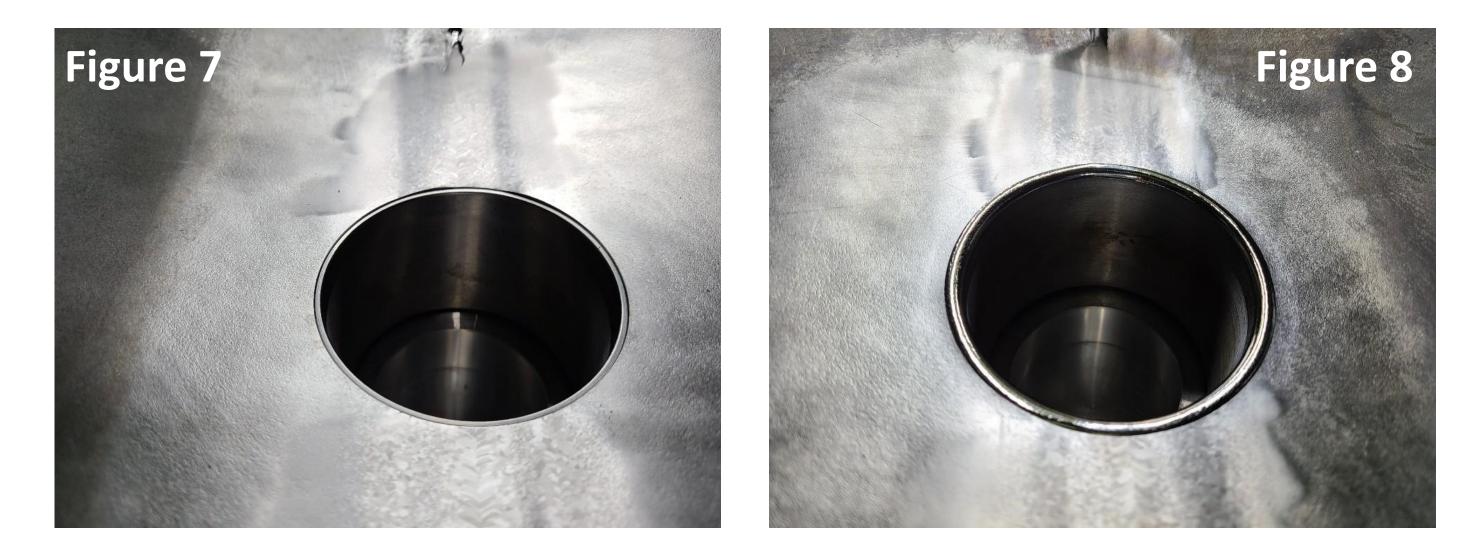


# **Buffered Chemical Polishing and High Pressure Rinsing**

Same as QWR and HWR, BCP was applied to SSR2 bare cavity. Nitric acid, fluoric acid, and phosphoric acid was mixed and used by 1:1:2 volume ratio, and cavity inner surface was

#### **SSR2 Half Shell and Spoke Press**

Engineering design of SSR2 SC cavity was evaluated through the technical advisory committee (TAC) by 2018, and TAC suggested to proceed the prototyping of SSR2 SC cavity. Fabrication process of SSR2 SC cavity applied some modifications of SSR1 SC cavity fabrication process, changing half shell production from spinning to press-forming. SSR2 bare cavity is divided into four sub-components, half shell, beam port, RF port, and spoke. Both the half shell and spoke has been made by press-forming. Comparing with SSR1, SSR2 half shell has almost 70mm deeper shape so the forming process is more difficult than SSR1. After many trial and error, SSR2 half shell press-forming is finished. Figure 2 shows the press-formed half shell shape with RRR300 niobium. RISP usually uses AL6061T0 for the first forming test, and uses OFHC for the second forming test. After checking first/second forming test results and modifying forming conditions, finally RRR300 niobium sheet is entered to the forming process so that there is no failure for niobium forming which has the highest risk. SSR2 half shell forming was done by pneumatic press and salted water test was also proceeded for checking the contamination of shell surfaces. Half shell was fully-soaked to the five-percent salted water by 30 minutes, dried 48 hours at the 10000 class clean room. After drying, visual inspection was proceeded and contamination was removed carefully. After removing contamination, half shell was cleansed, dried, inspected and moved to part welding

polished up to about 120um with 1um per minute etch rate. After BCP, SSR2 bare cavity was moved to HPR device and washed with 100 bar DI water. Figure 9 and 10 show the BCP and HPR process.

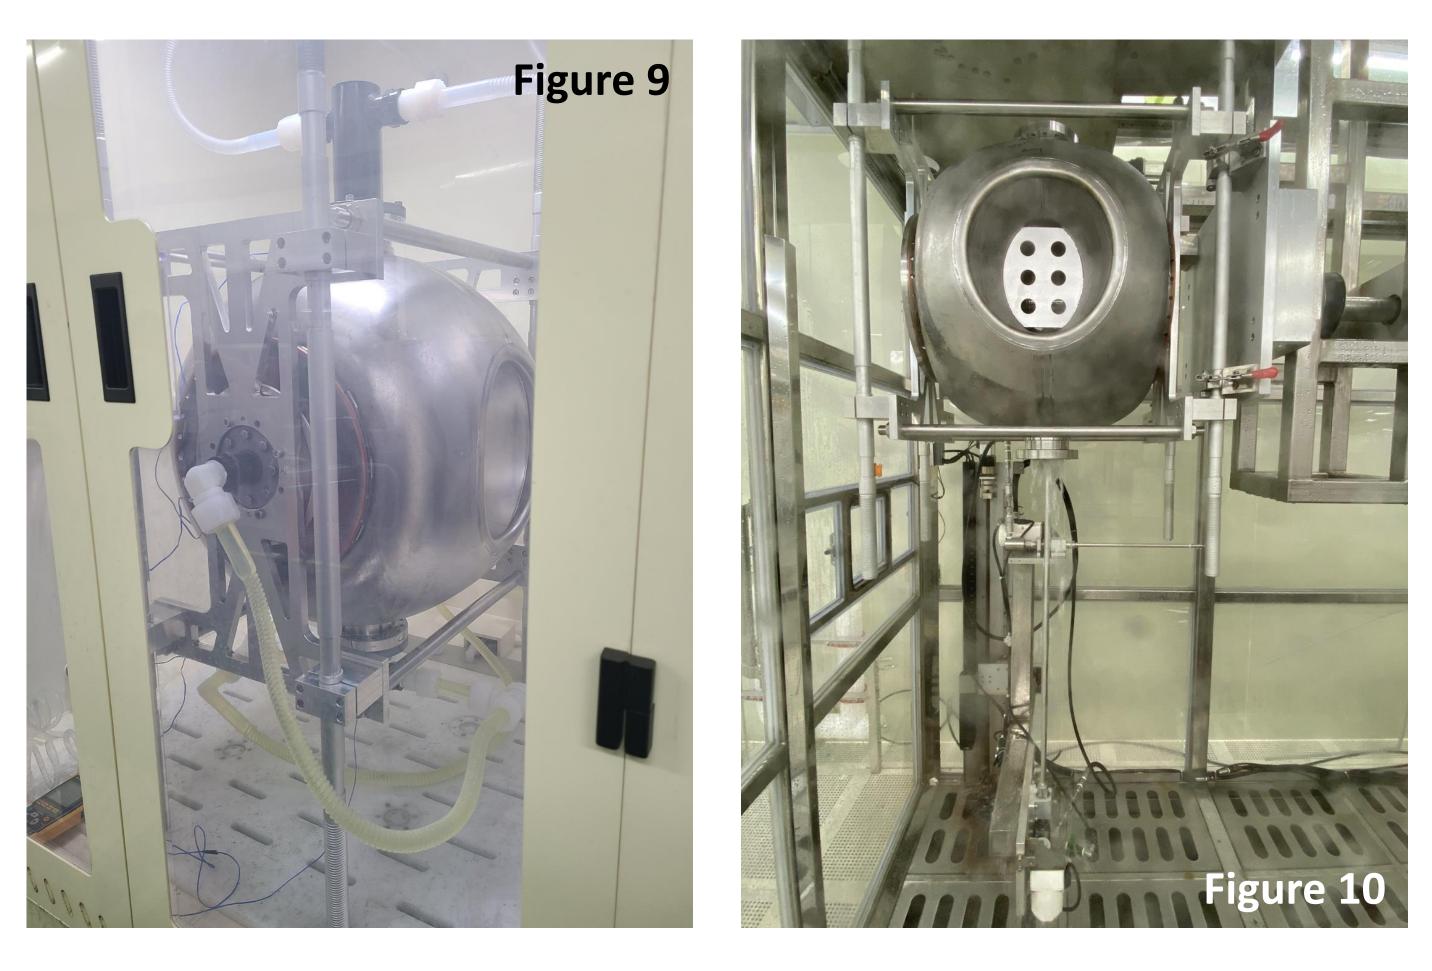

#### **Conclusions & Future Works**

when no defect was appeared. Spoke weldment was also made by press-forming and

electron beam welding (EBW), and moved to assembly process when dimension check

and visual inspection had no issue. Figure 3 and 4 show the shape of spoke weldment

and collar.

Currently two SSR2 bare cavities are made and prepared for VT, and other four cavities

will be made within this year. We expect that six SSR2 SC cavity prototypes will be tested

and evaluated. After bare cavity cold test, we expect that experimental results of SSR2 SC

cavity and further mechanical evaluation are presented.